stay connected


M12 female 0° S-coded field-wireable

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration




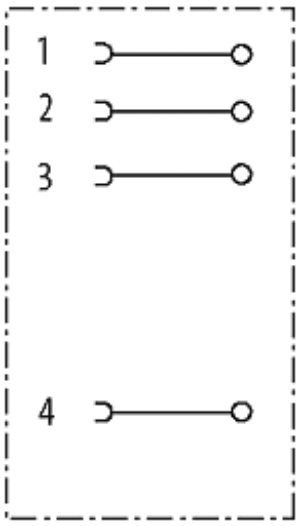

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

Female

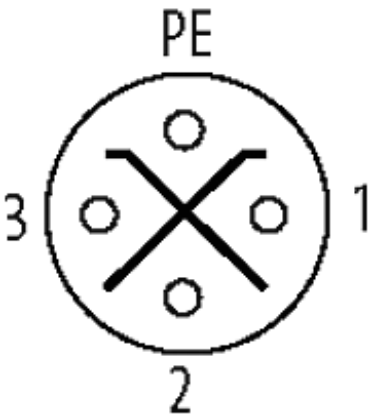

Product may differ from Image

Form	
Form	P6411
Technical Data	
Operating voltage	max. 630 V AC/DC
Rated surge voltage	6 kV
Operating current per contact	max. 12 A
Material group	IEC 60664-1, category III
Connection cross section	max. 1.5 mm²
Coding	S-coded
Sealing range (cable Ø)	8...10 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Material	PA
suitable for corrugated tube (internal Ø)	without
Compression gland	M12 (SW18)
General data	
Pollution Degree	3
Dimensions H × W × D	58×20×20 mm
Temperature range	-40...+85 °C
Material (gasket)	FKM
Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879653831
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17