Proteus Equipment

Handylift Hydraulic

Spec sheet


TECHNICAL SPECIFICATIONS

Dimensions.....See below drawings
Breakout force (kg).....1,500
Weight fully assembled (kg).....29
Heaviest single component (kg).....13
Total beam length (mm).....1,225
Max distance between wheels (mm).....1,040
Min/max hook box centres (mm).....250/980
Shipping carton dimensions (mm, LxWxH).....1270 x 240 x 340



FEATURES

- Stainless steel 40mm thick beam
- Also available in 'Ultra Duty' spec with thicker 50mm beam, to avoid flexing on very heavy covers or wide spans
- Custom beam lengths available
- Quick and easy to assemble - simply slide the beam through the channel on the main body, slide the hook boxes and wheel assemblies onto the beam, and you're good to go
- Can be quickly disassembled into sections for easy storage
- Comprehensive range of spare parts, keys and accessories available
- Larger models available for bigger manhole covers

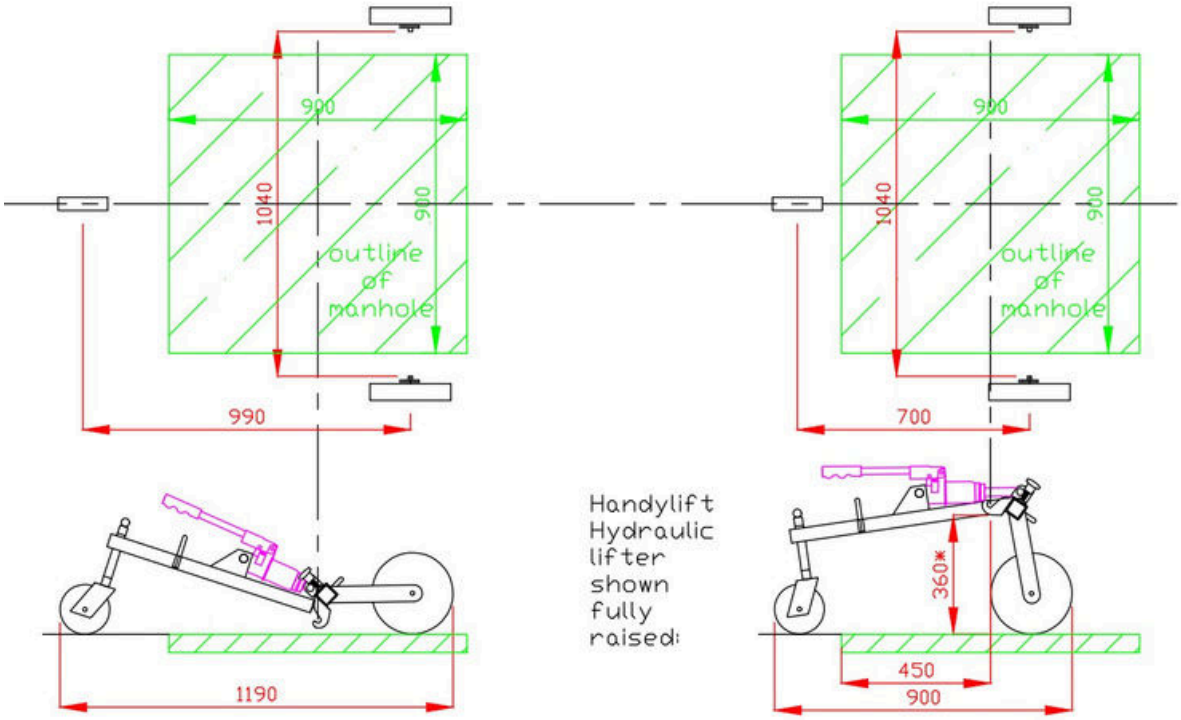

+44 (0) 1284 753954
info@proteusequipment.com
www.proteusequipment.com

Liquid Gas UK
CPA
FM32226
Constructionline

Proteus Equipment Ltd
Registered in England No. 2087313
Newlands Industrial Estate
Rushbrooke Lane
Bury St Edmunds, Suffolk
IP33 2RS