
PRST 4-PRKWT/LED P 4-07/XX

MICRO (M12) Double-Ended Cordset
4 Pole, 0.25mm², Male to Female Right Angle, LED P, PVC Cable with Stainless Steel Coupling Nut



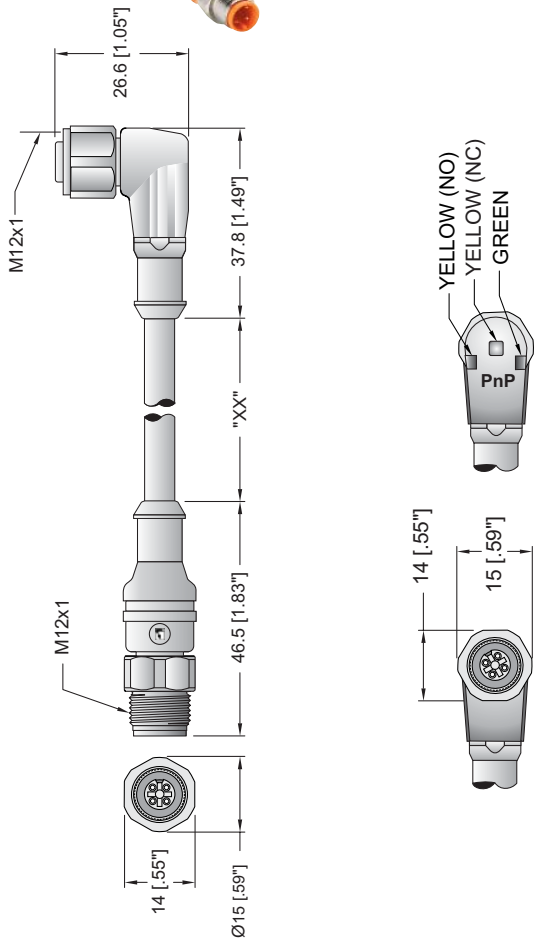


Technical Data


Material	
Molded Body	PVC, Orange (male) PVC, Transparent (female)
Coupling Nut	Stainless Steel
Contacts	Brass, gold over nickel plated
Insert	PVC, Orange
O-Ring	EPDM (female)
Electrical	
Current Rating	4A
Voltage Rating	10 - 30 VDC
Mechanical	
Temperature	-25°C to +70°C
Protection	IP 69 K
Cable Specifications	
Cable Jacket	PVC, Orange
Overall Diameter	5.0mm
Conductor	0.25mm², stranded

Features & Benefits

- 316L/V4A stainless steel coupling nut
- PVC inserts, molded body and cable jacket
- EPDM O-ring for female connector
- IP 69 K rated
- PNP LED yellow/yellow/green

Pin Assignments





Part Number	Poles
PRST 4-PRKWT/LED P 4-07/2M	4
PRST 4-PRKWT/LED P 4-07/5M	

© Copyright 2004. All rights reserved. Printed in the United States Of America AC FB T14 0604

Lumberg, Inc. • 14121 Justice Road • Midlothian, VA 23113-USA • Tel: 804.379.2010 • Fax: 804.379.3232 • info@lumbergusa.com