VACUPRESS® OIL

913047

Tubo in mescola termoplastica a base PVC,PU,GOMMA NITRILICA a due strati con spirale in acciaio zincato incorporata e rinforzo in fibra poliestere, per aspirazione e mandata oli, blue diesel, diesel e bio diesel.

Two-layer hose in thermoplastic PVC, PU, NITRILE RUBBER compound with embedded galvanised steel spiral with polyester yarn reinforcement for suction and delivery of oils, blue diesel, diesel, bio diesel.

SUPERFICI LISCE SMOOTH SURFACE	✸ ✸ ✸ ✸ ✸
FLESSIBILITÁ FLEXIBILITY	✸ ✸ ✸ ✸ ✸
RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE	ISO 4649:<90 mm³
TEMPERATURA D'IMPIEGO TEMPERATURE RANGE	-25° C + 55°C
RESISTENZA CHIMICA CHEMICAL RESISTANCE	tabella PVC OIL
RESISTENZA ALLO SCHIACCIAMENTO CRUSHING RESISTANCE	✸ ✸ ✸

Ø INTERNO Ø I.D. inch	Ø INTERNO Ø I.D. mm	Ø ESTERNO Ø O.D. mm	PESO WEIGHT g/m	RAGGIO CURVATURA BENDING RADIUS mm	PRESS. ESERCIZIO WORKING PRESS. bar	PRESS. SCOPPIO BURSTING PRESS. bar	SOTTOVUOTO VACUUM m H_2O	LUNG. ROTOLI COIL LENGTH mt
3/4	**19**	28	450	70	16	48	9	60
1	**25**	35,5	670	80	16	48	9	60
	30	40,6	770	90	16	48	9	60
1 1/4	**32**	42,5	800	100	16	48	9	60
	35	48	1050	120	14	42	9	60
1 1/2	**38**	51	1200	125	14	42	9	40
	40	53	1200	130	14	42	9	40
1 3/4	**45**	58	1340	140	12	36	9	40
	50	64	1730	150	12	36	9	40
	60	74	1950	180	12	36	9	40
2 1/2	**63**	77	2030	190	12	36	9	40

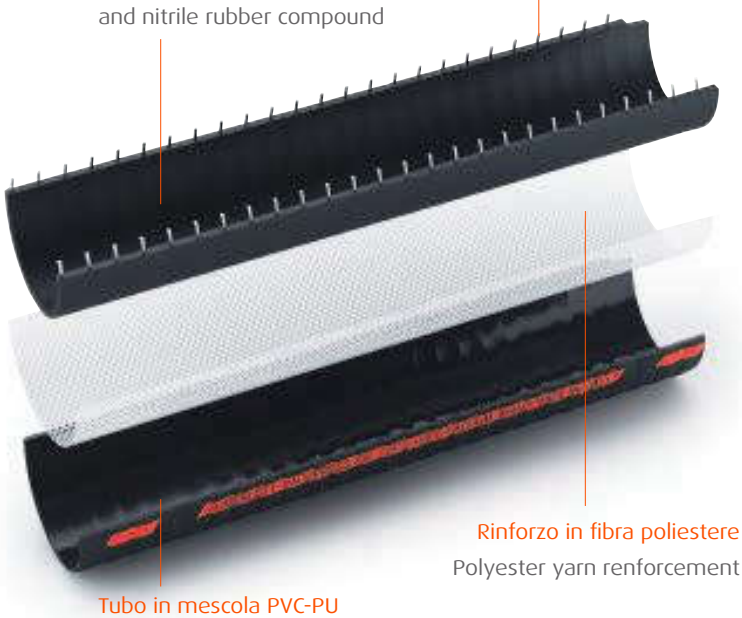





All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291) - tolerance on all specifications ±5% • Tutti i dati tecnici sono riferiti ad una temperatura di 23° C ± 2° C (ISO 291) - tolleranze su tutti i dati indicati ± 5%.
To verify if the item of your interest is "on stock" or "on demand" pls refer to our web site • Per verificare se il prodotto che ti interessa è in stock o su richiesta consultare il nostro sito.