SLK205-K



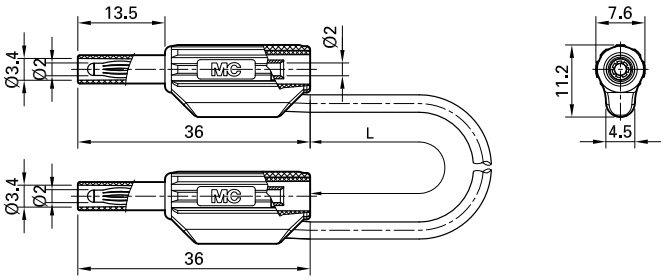

Item number 65.9179- ☐ *

Highly flexible, with insulation in PVC with assembled stackable Ø 2 mm MULTILAM plugs with rigid insulating sleeve on both ends.

Technical data	
Diameter of plug system	2 mm
Rated Values	600 V, CAT II, 10 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Lead cross section	0.5 mm²
Lead lengths ☐	30 cm; 60 cm; 100 cm
Lead insulation	PVC
Colours *	21 22 23
Test accessory acc. to	IEC EN 61010-031
Approvals	UL, CE
Remarks	Other color and/or length combinations available on request.

Stäubli Electrical Connectors AG Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet SLK205-K 10.2018