Clip, 6.3x32 mm, 32 A, BeCu





600 VAC/DC · 32 A (UL)

Description
- BeCu Clip up to 32 A Application

Standards
- UL 4248-1
- CSA 22.2 no. 4248.1

Approvals
- UL File Number: E39328

Applications
- Industrial electronic
- Photovoltaic

References
Fuseholder to SUT 6.3x32

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data


Fuse-Link	6.3 x 32 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	600 VAC/DC
Rated current	32 A (UL)
Admissible Ambient Air Temp.	-55 °C to 125 °C
Material: Terminals	BeCu
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< mΩ at 20 mV

Dimension

8.2 mm

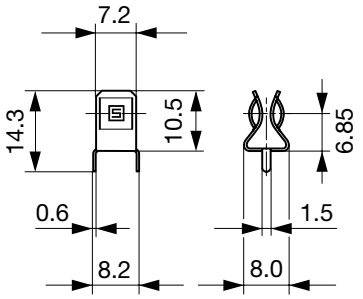



Drilling diagram

All Variants

Clip	Material: Terminals	Order Number
●	Tin-plated Beryllium-Copper	8040.0001
●	Silver-plated Beryllium-Copper	8040.0003

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit

Bulk (1000 pcs.)

29.04.2015

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.