STEALTH 7000™

JUNIOR RANGE - BLACK TEMPLES - CLEAR LENS

CONTOUR DESIGN & FLEXIBILITY OF FRAME GIVES A GOOD VERSATILE FIT ONTO BOTH SMALLER & LARGER FACES


TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

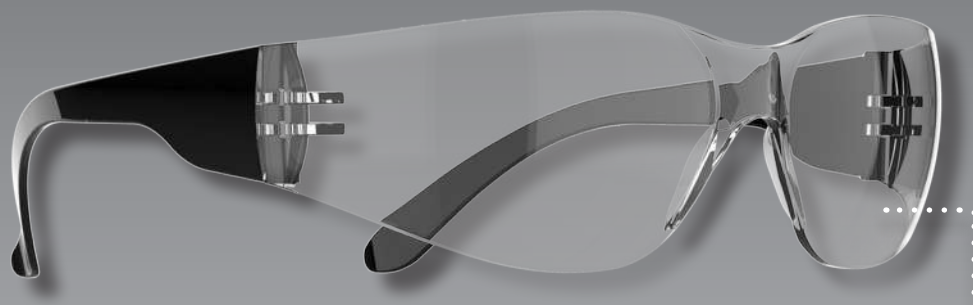

FRAME: Polycarbonate

LENS: Polycarbonate

PERFORMANCE

Lens and frame offer protection against low energy high-speed particles at 45m/s (101mph)

The optical qualities of the lens comply with the requirements of optical class 1 (highest)



LOGOEXPRESS™
ADD YOUR LOGO TO OUR PRODUCTS

CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN 166 1.F & EN 170

EC Certificate Number C1017.3JSP issued by ECS GmbH

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com

STEALTH 7000™

JUNIOR RANGE - BLACK TEMPLES - CLEAR LENS

CONTOUR DESIGN & FLEXIBILITY OF FRAME GIVES A GOOD VERSATILE FIT ONTO BOTH SMALLER & LARGER FACES


TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

DIMENSIONS OF INNER BOX

Quantity: 10


Weight: .24Kg pk -10 (Approx.)

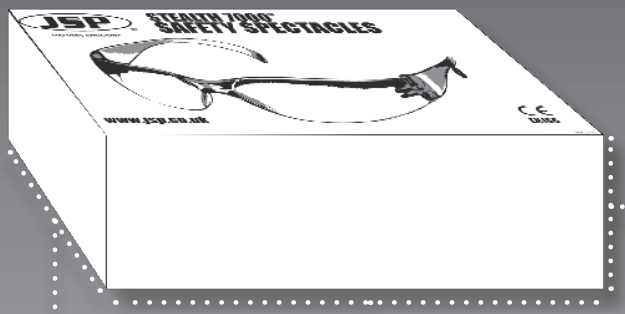

HEIGHT: 80mm

WIDTH: 170mm

LENGTH: 290mm

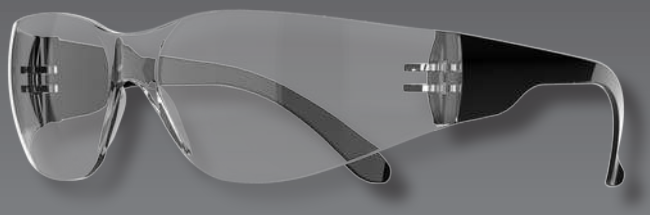

DIMENSIONS OF SPECTACLE

Lens Thickness: 2.3mm

Lens Size (Vertical): 39mm

Lens Size (Diagonal): 66mm

Bridge: 10.6mm

Temple Length (Lens to tip): 144mm

Overall Width: (hinge-hinge)120mm


Closest point between temple tips: 73mm

Weight: 18.5g (Approx)

DIMENSIONS OF OUTER PACKAGING

Quantity: 120

Weight: 3.7kg (Approx.)

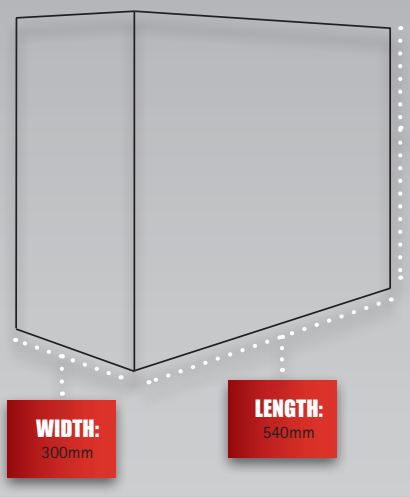

HEIGHT: 370mm

WIDTH: 300mm

LENGTH: 540mm

MARKINGS

Frame: EN166 1.F.H

Clear Lens: 2C-1.2 1.F.H.K

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 7000™ is not suitable for protection against dusts, liquids or molten metals

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com