Industrial SLC SD Card



Standard Grade: Blue
Industrial Grade: Red.

Features

- Support static and global wear leveling
- S.M.A.R.T Supported
- Intelligent system for error recovery
- Excellent data transfer speed
- Enhanced power cycling
- Golden finger 30u”

R: 20MB W: 16MB | S.M.A.R.T | Wear Leveling | SPI Mode Support | ECC Engine | Enhanced Power Cycling

Specifications

Interface	9 pin SD standard
Flash Type	SLC (Single Level Cell)
Density	128MB~32GB
Transfer Mode	SD and SPI mode
Sustained R/W Performance	Read：20 MB/sec (max.) Write：16 MB/sec (max.)

Environmental

DC Input	2.7V to 3.6V
Power consumption (Max.)	Read: 40 mA Write: 60 mA Idle: 180 μA
Operating Temperature	0˚C~+70˚C (Standard Grade) -40˚C~+85˚C (Industrial Grade)
Storage Temperature	-55˚C~+95˚C
Humidity	Relative Humidity: 10-95%, non-condensing
Flash Endurance	100,000 program/erase cycles
MTBF	> 3,000,000 hours
Certification	CE, FCC, RoHS
Warranty	5 years

Mechanicals

Dimension (W x L x H)	24mm x 32mm x 2.1mm
Weight	2.1g±0.05g
Vibration	7 Hz to 2K Hz, , 3 axes
Shock	Duration: 0.5ms, 1500G, 3 axes

Health monitoring Tool

S.M.A.R.T.	Supported


Ordering Information

Capacity	Standard Grade	Industrial Grade
128MB	DS2A-128I81C1B	DS2A-128I81W1B
256MB	DS2A-256I81C1B	DS2A-256I81W1B
512MB	DS2A-512I81C1B	DS2A-512I81W1B
1GB	DS2A-01GI81C1B	DS2A-01GI81W1B
2GB	DS2A-02GI81C1B	DS2A-02GI81W1B
4GB	DS2A-04GI81C1B	DS2A-04GI81W1B
8GB	DS2A-08GI81C1B	DS2A-08GI81W1B
16GB	DS2A-16GI81C1B	DS2A-16GI81W1B
32GB	DS2A-32GI81C1B	DS2A-32GI81W1B

DESIGN ◎ SERVICE ◎ QUALITY ◎ DELIVERY

Headquarter (Taiwan) : HTTP://WWW.INNODISK.COM E-MAIL:SALES@INNODISK.COM
TEL: +886-2-26963000 ADD: 9F., No.100, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City, Taiwan(R.O.C.)
USA Office: usasales@innodisk.com / Europe: eusales@innodisk.com / Japan: jpsales@innodisk.com / China: sales_cn@innodisk.com

Mechanical Dimension

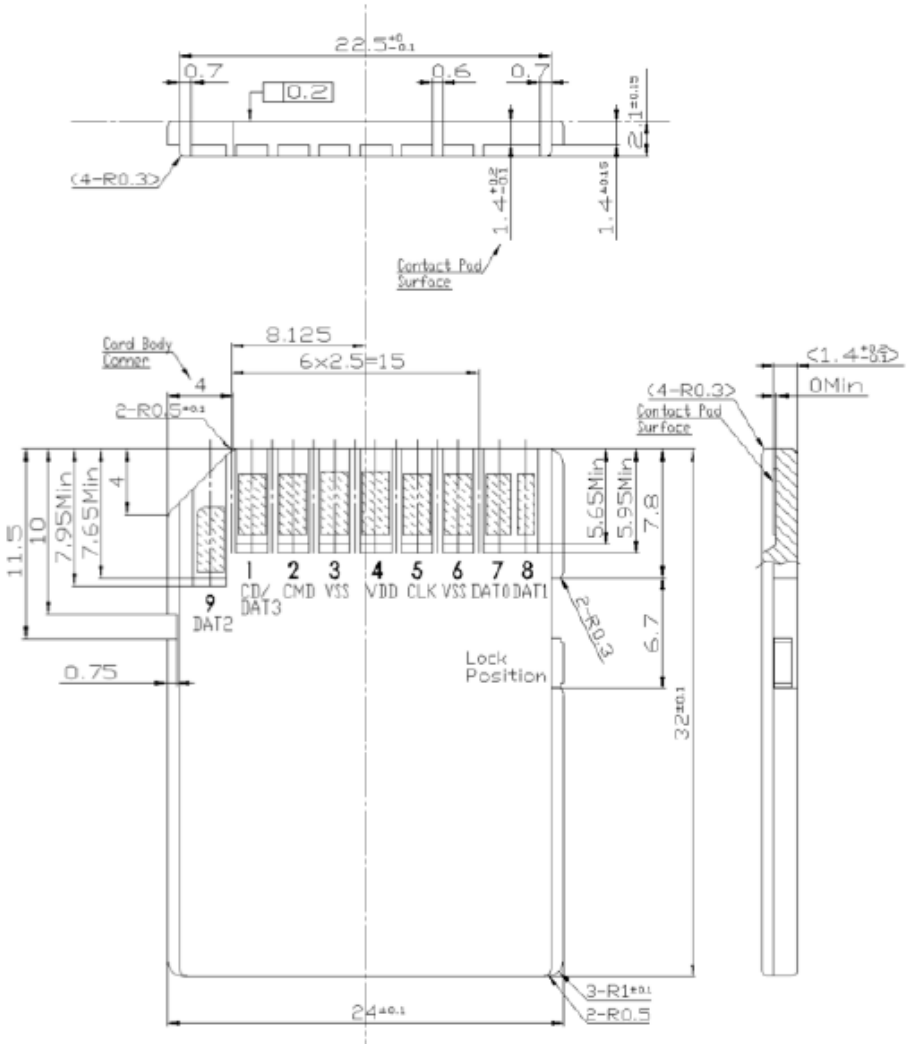

Tolerance ± 0.15

DESIGN ◎ SERVICE ◎ QUALITY ◎ DELIVERY