THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/08/03	B.MAZEJKA
B	ECN# 2731 - ADDED ROHS STAMP	10/23/07	D.GRIFFIN
C	ECN 3388: ADD PACKAGING NOTE\UPDATE FORMAT	6/12/08	D.GRIFFIN
D	ECN#3680, ADDED PACKAGING TABLE	2008.10.30	E. STAUBLE

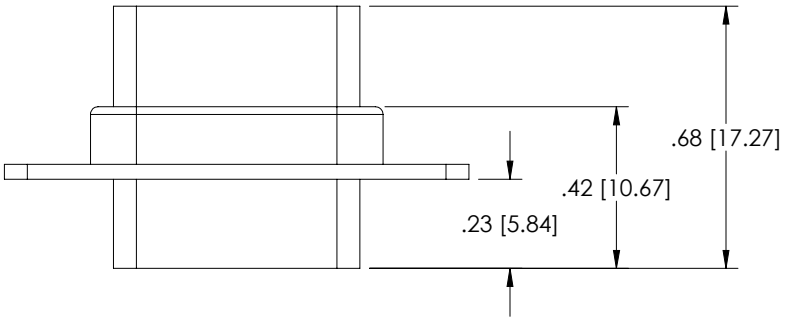

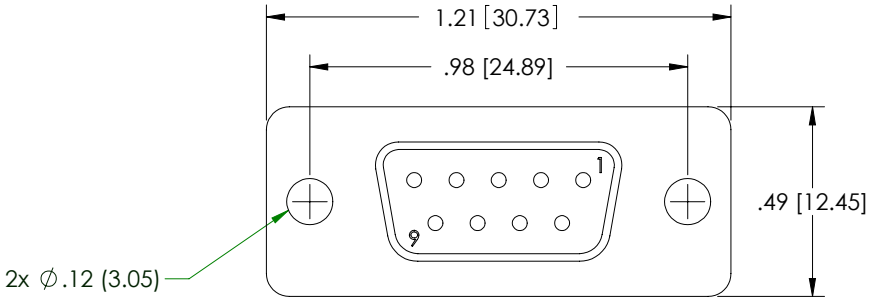

NOTES:

MATERIAL:
SHELL: STEEL
INSULATOR: PBT W/ GLASS FIBER FILL (UL 94V-0 RATED)

FINISH:
FRONT SHELL: BRIGHT TIN/NICKEL PLATED
REAR SHELL: BRIGHT TIN PLATED

CATALOG #	PACKAGING
C&P9F	1/BAG
C&P9F-TRAY	50/TRAY

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = .3
.XX = .15

PROJECTION

APPROVALS	DATE
DRAWN BY B.MAZEJKA	11/10/2003
CHECKED BY C.McCORMICK	12/08/2003
APPROVED BY D.PARHAM	12/08/2003

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

REF

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
DSUB

PRODUCT DESCRIPTION
DB9F CRIMP & POKE CONNECTOR

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	C_P9F	D

SCALE: NONE | CAD FILE: C_P9F.SLDDRW | SHEET 1 OF 1