8LT4K07BG

STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED WITH CONTINUOUS OR PULSED SOUND, 24VDC




Product designation				Signal tower Ø45mm/1.7"
Product type designation				8TL4
General characteristics				
Diameter			mm - inch	45 / 1.77
Supply voltage (DC)			V	24±10%
Colour				Green, blue, orange, red
IEC degree of protection				IP54
Light consumption per module (DC)			mA	37
Sound module consumption (DC)			mA	15
Sound intensity			dB	80
Mechanical features				
Tightening torque for terminals max			Nm	0.5
Terminals screw				Screw clamp terminals
Conductor section				
	AWG/Kcmil			
		max		16
	IEC			
		max	mm²	1.5
Weight			g	400
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+50
Dimensions				


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

8LT4K07BG

STEADY LIGHT MODULE. Ø45MM. BUILT-IN LED CIRCUIT. GREEN, BLUE, ORANGE, RED WITH CONTINUOUS OR PULSED SOUND, 24VDC

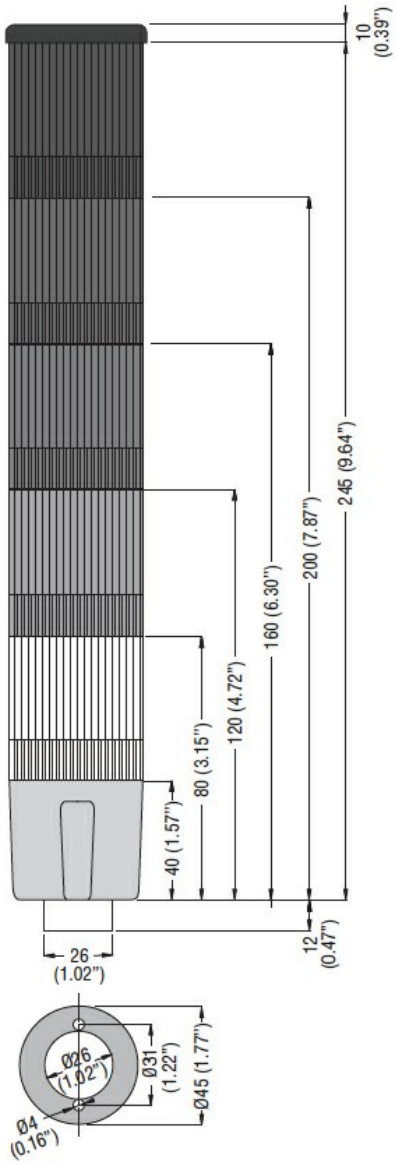

Wiring diagrams

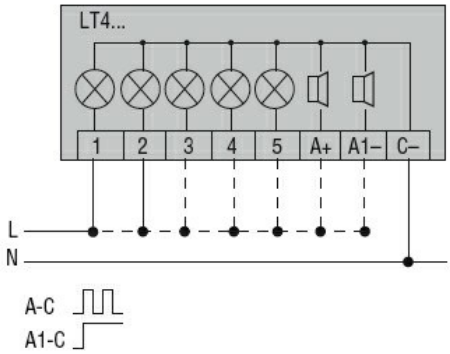

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certificates

	cULus
	EAC

ETIM classification

ETIM 8.0	EC001042 - Signal tower complete

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding