HIRSCHMANN® Test & Measurement
A BRAND OF SKS

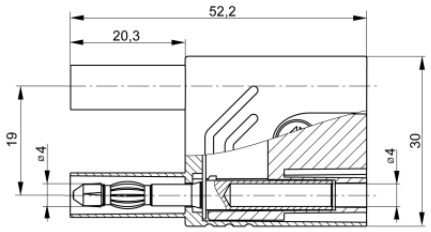
SKS Kontakttechnik GmbH

Plugs

KST S WS



CE

Product	KST S WS
description	Touch protected shorting plug with caged spring and unsprung socket, with onward connection capability and shatter-proof insulated sleeve.
operating instruction	BA462
article-no. / *colour	9322001xx 00 black, 01 red, 02 blue, 03 yellow, 04 green, 05 brown, 06 gray, 07 white, 09 violet, 88 yellow green Ni
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current (consider derating curve)	32 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010(1)	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1) contact the manufacturer for applications at deviating temperature ranges
stand: 19.12.2022

4 mm safety system

stand: 19.12.2022