

Model 4995
Binding Post, Spring Loaded, Per MIL-P-55149/8



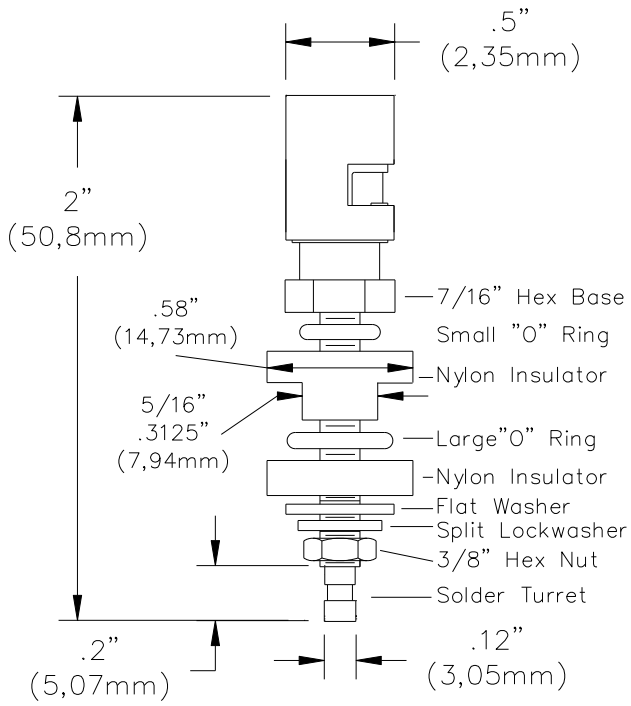

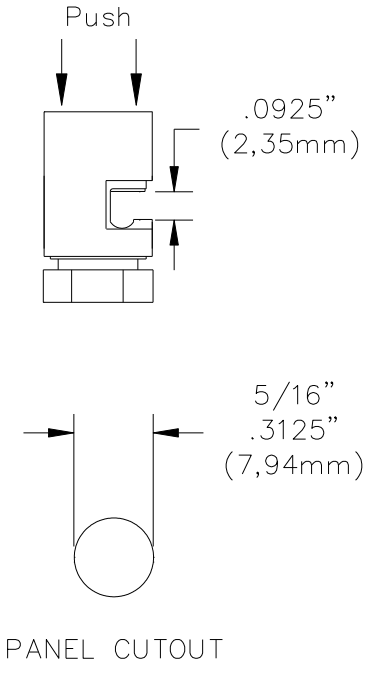

FEATURES:
- ✓ Spring-loaded cap captures wire securely for fast connection and release.
- ✓ Mounts in panels from .062" (1.57mm) to .125" (3.18mm) thick.
- ✓ Accepts wire size up to .0925" (2,35mm) diameter.
- ✓ Complies with MIL-P-55149/8.

MATERIALS:
Body: Nickel Plated Brass
"O" Rings: Silicon Rubber
Cap: Silicon Rubber, Red or Black over body
Hardware: Hex Nut, Split Lockwasher, Brass Washer, Nylon Washer, "O" Rings, Body, Cap

RATINGS:
Voltage: Hands free usage in controlled voltage environments: 1200 Vrms Max. *For CE compliance*: not intended for hand-held use at voltage above 33 Vrms/70 Vdc.
Current: 15 Amperes
Temperature: +239ºF (+115ºC) Max.

ORDERING INFORMATION:
Model 4995-0 (Black)
Model 4995-2 (Red)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com