


N32H

DIGITAL METER OF D.C. CIRCUIT PARAMETERS

- Voltage measurement ±600V (maximum range display ±1200 V), current measurement via shunt, power, energy and capacity measurement of d.c. circuits.
- Two-line LCD display with high contrast and built-in backlighting.
- Possibility of displaying the measured value and time simultaneously or an second measured value or unit (automatically displayed unit of measured quantity).
- Wide range of voltage measurement at the shunt input up to 1500 mV.
- High sampling frequency of measured signals.
- Programming parameters via buttons or RS-485 interface and free e-con software.
- 4 alarm outputs with signaling on led diodes, working in 7 different modes (option).
- Pulse output to control energy consumption.
- Conversion of any measured value into an analog signal 0/4...20 mA or 0...10V (option).
- Memory of minimal and maximal values for all measured quantities.
- Automatic voltage measurement compensation function.

EXAMPLE OF APPLICATION

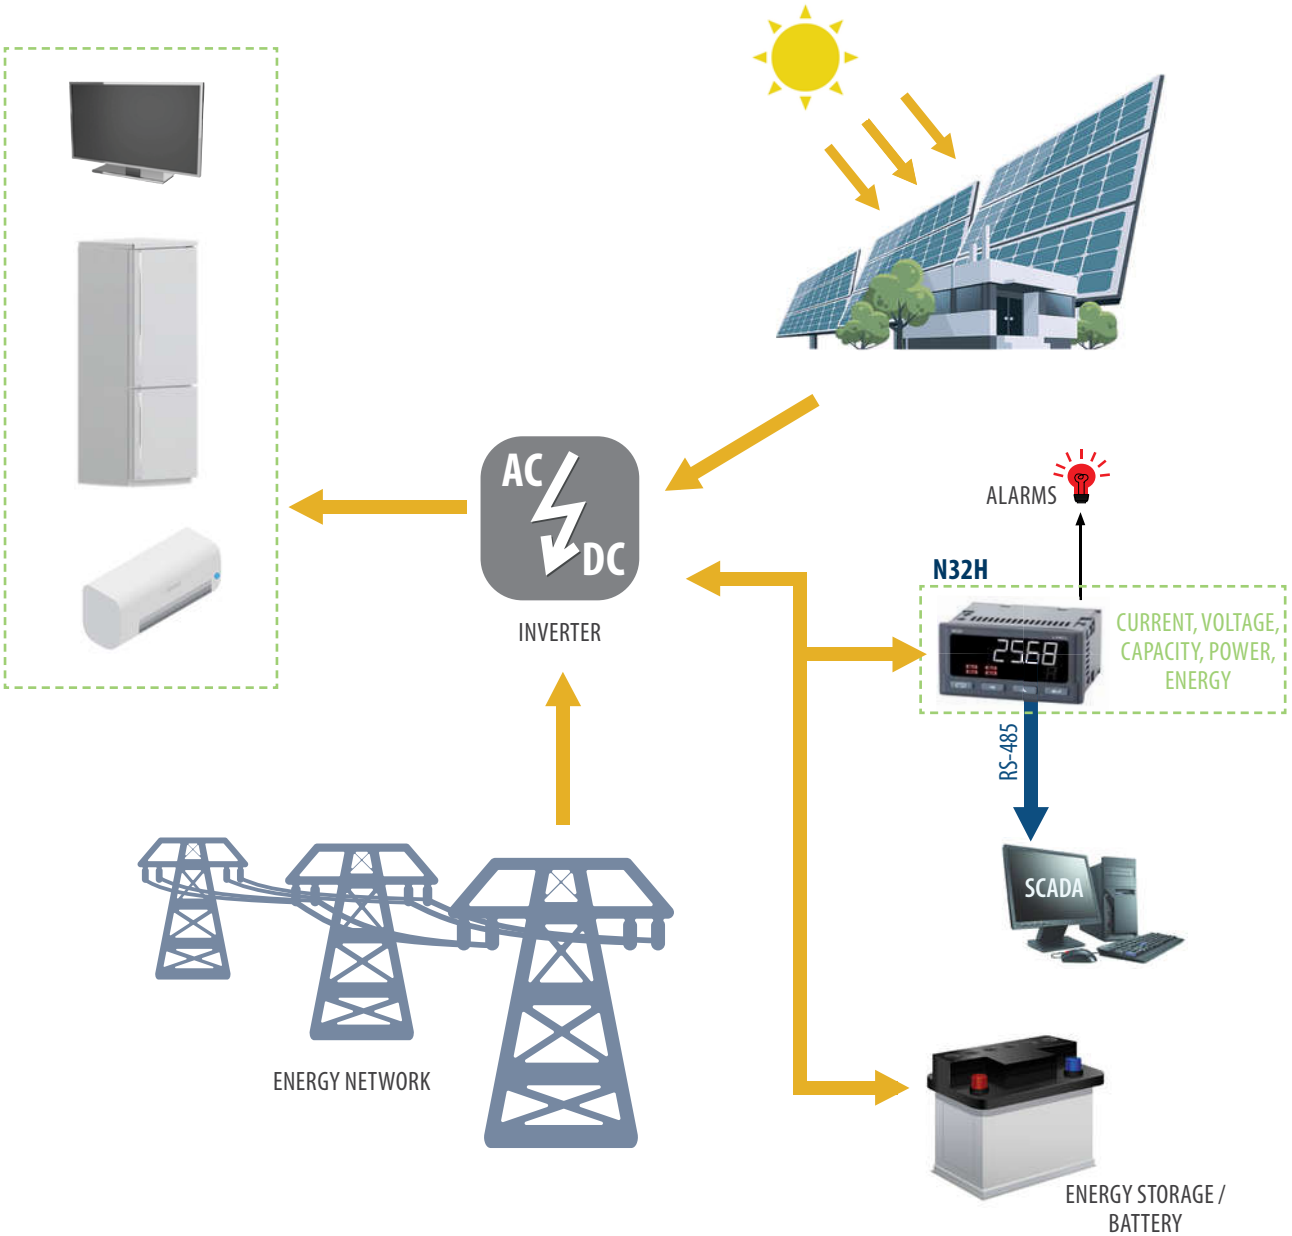

N32H - DIGITAL METER OF D.C. CIRCUIT PARAMETERS

FEATURES	INPUTS	OUTPUTS	GALVANIC ISOLATION
eCon, MOD BUS, RTC, Password protection, IP65	-600 ... 600 V d.c., -1500... 1500 mV	0/4...20 mA, 0..10 V, 1x, 3x, RS 485	Supply, RS 485

MEASURED QUANTITIES AND CALCULATED BY THE METER

- d.c. voltage **U**
- d.c. current **I** (indirectly through the shunt)
- d.c. power **P**
- averaged voltage in a given range $\mathbf{U}_{AV}$
- averaged current in a given range $\mathbf{I}_{AV}$
- power averaged in a given range $\mathbf{P}_{AV}$
- capacity counter (accumulated current) CAP
- energy counter E
- maximum and minimum values in the given averaging period
- current time

DATA VISUALISATION



or





or




Two-line display.
Simultaneous preview of two measured values e.g. current and power.

Automatically displayed unit of measured value and symbol of multiplier kilo, mega.

Preview of current time on the bottom line of the display.
Real-time clock with automatic winter/summer time change function.


N32H - DIGITAL METER OF D.C. CIRCUIT PARAMETERS

BIDIRECTIONAL MEASURING INPUT

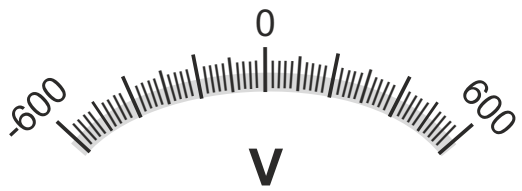

Bidirectional voltage measurement in a wide range of ± 600V (maximum indication range ± 1200V) and bi-directional current measurement through a shunt. This function is useful, among others when monitoring the parameters of an energy storage system.

50 mV
60 mV
75 mV
100 mV
150 mV

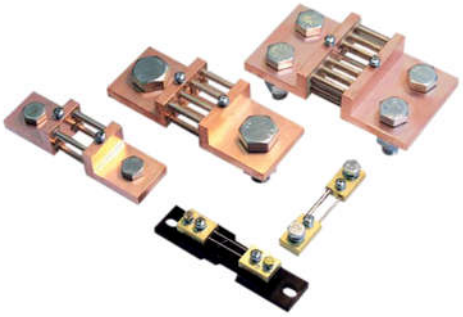

Universal input for measuring with any type of shunt with a wide voltage measurement range up to 1500 mV.


Automatic compensation of the voltage drop on the measuring shunt to support the correct measurements of voltage, power and energy in relation to the load.

ALARM FUNCTIONS



1 or 4 relay outputs with signaling on the display in the form of an active alarm number.

Each of the alarms can be configured to work in one of 7 modes, incl. REG mode for alarm control via RS-485 Modbus.

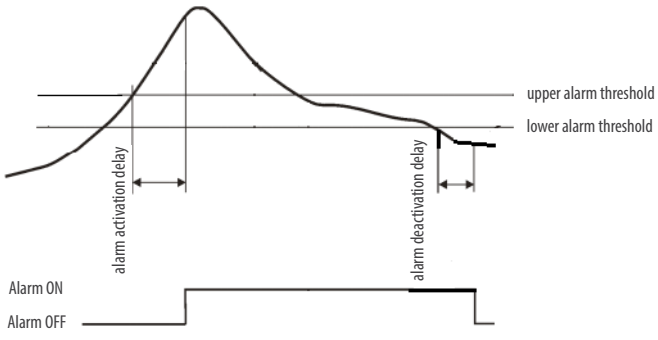



t ≥ time delay --> Alarm activeted
For alarm operation both conditions (value and time delay) must be met

Programmable maintenance of alarm signaling. After the alarm event has ceased, the alarm status marker blinks on the display until it is deleted by the user.

Individually programmable parameters of switching on and switching off the alarm; this feature can be used to prevent „false" alarms from occurring.

WALKING WINDOW ALGORITHM

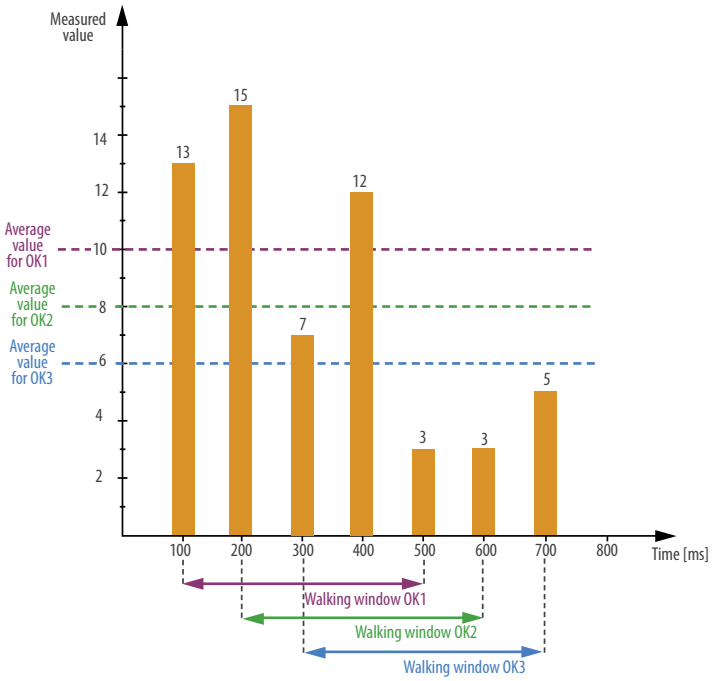

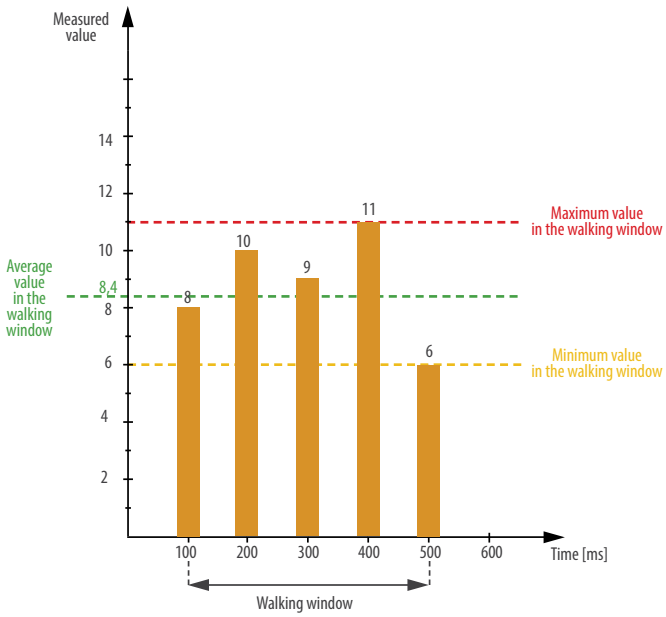

Programmed averaging time according to the walking window algorithm with a given averaging time. This function is useful for measuring signals with high dynamics.

Possibility to measure the average, minimum or maximum value during the walking window.

TECHNICAL DATA

INPUTS AND MEASURING RANGES

Measured quantity	Nominal range	Maximum range of indications	Class
Voltages	50 V	-75...75 V	0.1
	100 V	-160..160 V	
	150 V	-300...300 V	
	300 V	-600...600 V	
	600 V	-1200...1200 V	
Currents (shunt voltage)		60000...60000 A (-1500...1500 mV)	
Capacity (accumulated current)		-99999...999999 MAh	±0.5 %
Power		all ranges	0.2 + shunt class
Energy		-99999...999999 MWh	±0.5 % + shunt class

OUTPUTS

Output type	Properties	Remarks
Relay output	• 1 NO contanct, load capacity 5A / 250 V a.c.; 5A / 30V d.c. • 3 relays with a changeover contact, load capacity 6A / 250V a.c.; 6A / 30V d.c.; 0,15A / 250V d.c.	
Analog output	• programmable current 0/4...20 mA, load resistent ≤ 500 Ω • programmable voltage 0...10 V, load resistent ≥ 500 Ω	Analog output error: **0.1% of the set range** Additional error from temperature changes: **50% of class/10K**
OC output	OC type, passive npn, 30 V d.c./30 mA	voltage free output

N32H - DIGITAL METER OF D.C. CIRCUIT PARAMETERS

DIGITAL INTERFACE

Interface type	Transmission protocol	Mode	Baud rate
RS-485	MODBUS RTU	8N2, 8E1, 8O1, 8N1	2.4, 4.8, 9.6, 14.4, 19.2, 28.8, 38.4, 57.6, 115.2 kbit/s

EXTERNAL FEATURES

Readout field	1 row 6-digit; digits height 12.85 mm 2 rows: 5-digit; digits height 7.5 mm	high contrast LCD with backlight and programmable measuring unit
Weight	< 0.25 kg	
Overall dimensions	96 x 48 x 93 mm	mounting hole: $92^{+0.6}$ x $45^{+0.6}$ mm
Protection grade (acc. to EN 60529)	from frontal side: IP65	from terminal side: IP 10


RATED OPERATING CONDITIONS

Supply voltage	85...253 V a.c. (40...400 Hz), 90...300 V d.c. 20...40 V a.c. (45...65 Hz) / 20..60 V d.c.	power consumption < 6 VA
Temperature	ambient: -25...23...55°C	storage: -30...70°C
Relative humidity	25...95%	without condensation
Operating position	any	
External magnetic field	0...400 A/m	


SAFETY AND COMPABILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation between circuits	basic	acc. to EN 61010-1
Polution level	2	
Installation category	III	
Maximal phase-to-earth voltage	for supply circuits: 300 V	
	for other circuits: 50 V	
Altitude a.s.l.	< 2000 m	

CONNECTION DIAGRAMS

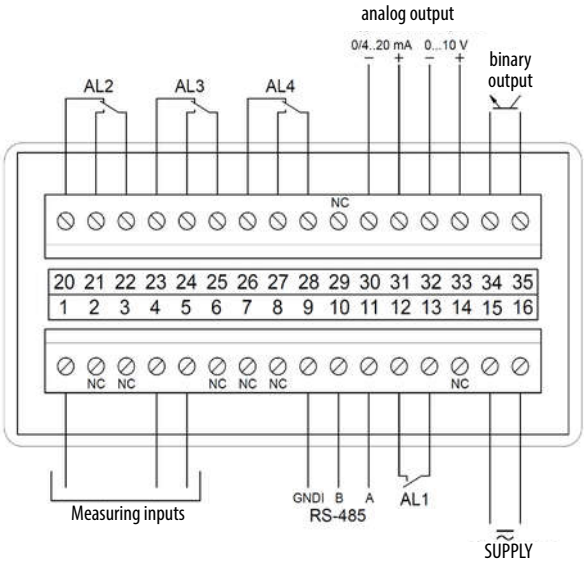

Description of signals on the connector strips

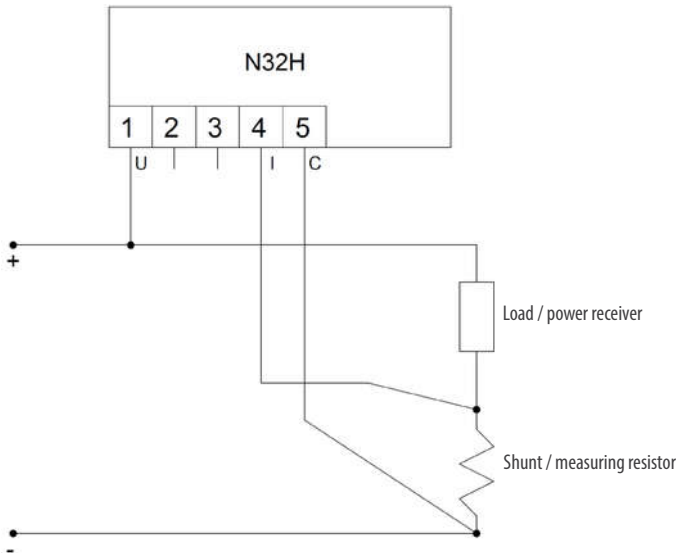

Meter connection

N32H - DIGITAL METER OF D.C. CIRCUIT PARAMETERS

ORDERING CODE

N32H	X	X	XXXXXXX	X	X
Supply:					
85...253 V a.c., 90...300 V d.c.	1				
20..40 V a.c./ 20..60 V d.c.	2				
Dodatkowe wyjścia:					
1 relay output, RS-485		1			
4 relay outputs, RS-485		2			
4 relay outputs, RS-485, 1 analog output		3			
Version:					
standard			0000000		
custom-made*			XXXXXXX		
Language:					
Polish/English				M	
Acceptance tests:					
without additional quality requirements					0
with an extra quality inspection certificate					1
with an extra calibration certifiate					2
acc. to customer's request					X

* only after agreeing with the manufacturer

ORDERING EXAMPLE:

N32H 130000000M0 means N32H meter with supply 85... 253 V a.c.,90...300 V d.c. with 4 relay outputs, RS-485 interface and 1 analog output, in standard version, polish-english language version, without addtional quality requirements.

LUMEL
EVERYTHING COUNTS

LUMEL S.A.
ul. Słubicka 4, 65-127 Zielona Góra, Poland
tel.: +48 68 45 75 100, fax +48 68 45 75 508
www.lumel.com.pl

Technical support:
tel.: (+48 68) 45 75 143, 45 75 141, 45 75 144, 45 75 140
e-mail: export@lumel.com.pl

Export department:
tel.: (+48 68) 45 75 130, 45 75 131, 45 75 132
e-mail: export@lumel.com.pl

Calibration & Attestation:
e-mail: laboratorium@lumel.com.pl