Datenblatt - Fiche technique - Data sheet

11.02.8908



ROLINE USB 2.0 Kabel, Typ A-A, 0,8m

ROLINE Câble USB 2.0 Type A-A, 0,8m

ROLINE USB 2.0 Cable, Type A-A, 0.8 m

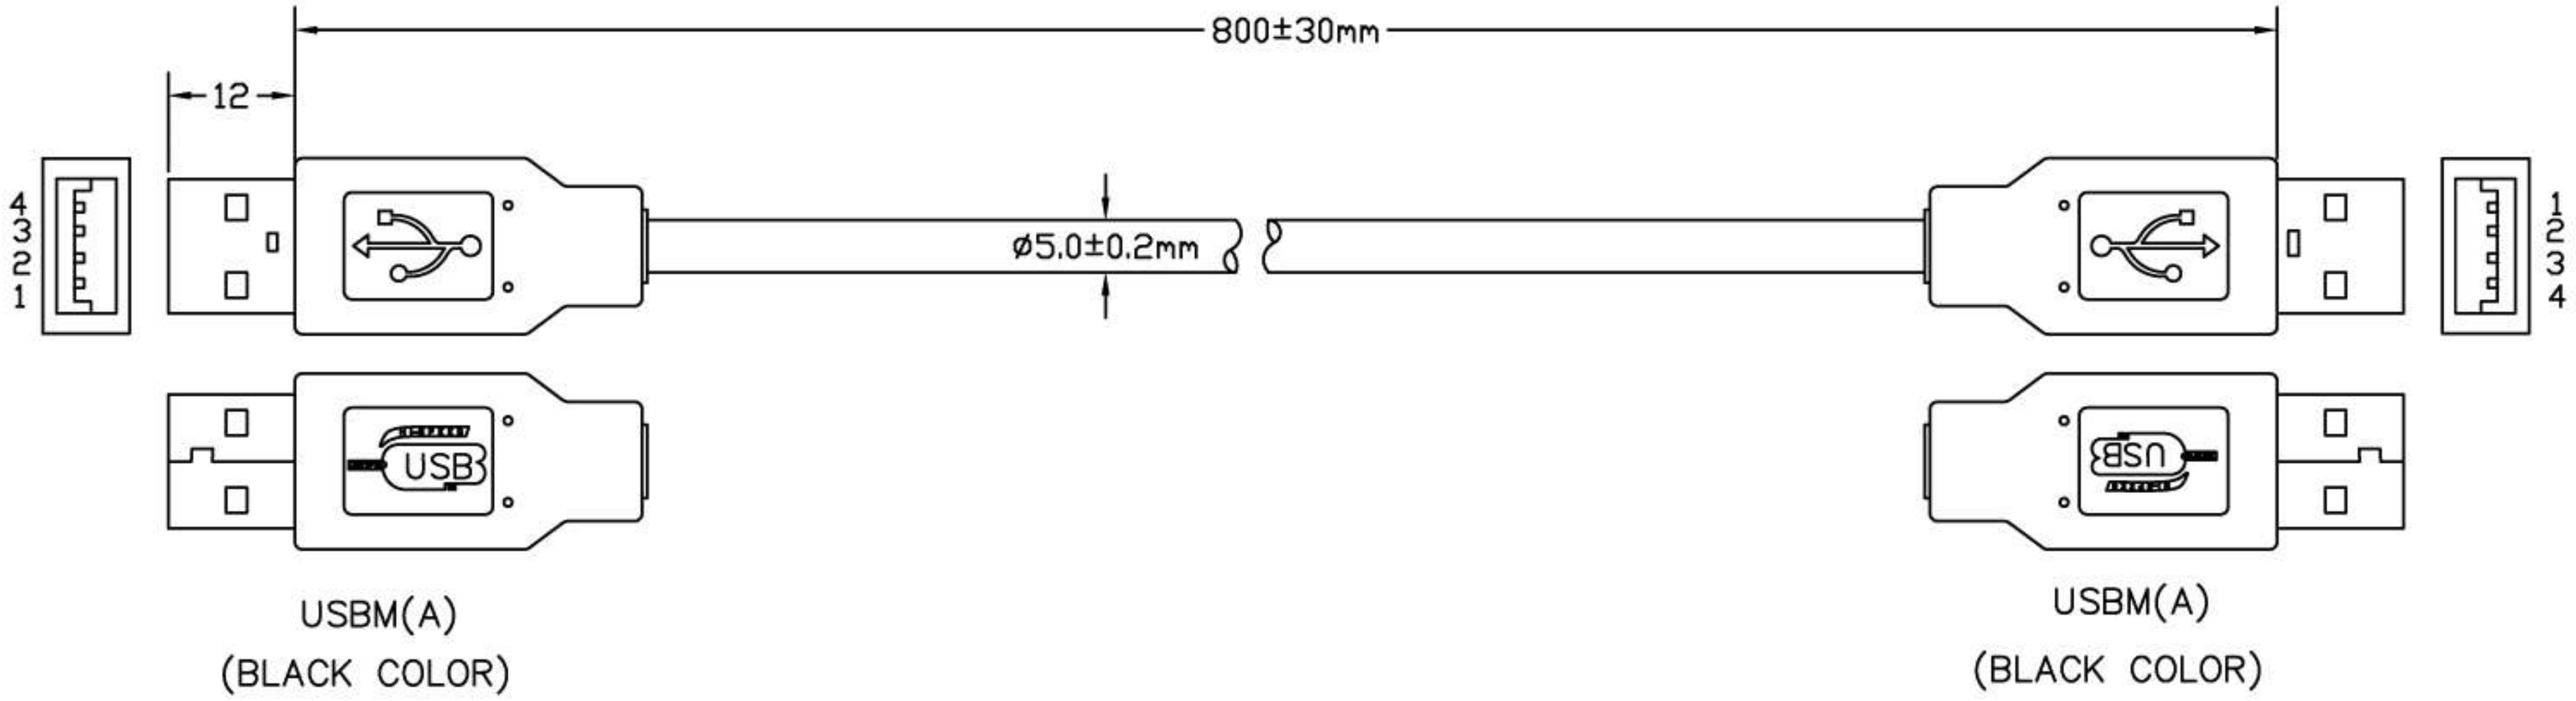

JACKET PRINTING:USB SHIELDED HIGH SPEED CABLE 2.0 REVISION

NOTE: 28AWG/1P+24AWG/2C E314459 兄 AWM 2725 80℃ 30V VW-1

1. CABLE: UL2725,AL+B-FOIL,28AWG*1P+24AWG*2C,BLACK COLOR,OD=5.0mm,PVC JACKET.
   (AL/MG 65%,double shielded, bare copper conductor,)(NOTE: USB2.0 WIRE MATERIAL).
2. LENGHT: 800mm.
3. CONNECTORS: USBM(A)*2PCS(WHITE INSULATOR)(SHELL NICKEL)(PIN GOLD FLASH 30U").
4. MOLD: MOLDING USBAM TYPE.
5. CONTACTS:

1	2	3	4	64
1	2	3	4	64
RED	WHITE	GREEN	BLACK	SHIELD
	#28	#28		
	PAIR			

   WHITE/GREEN PAIR...28AWG , RED/BLACK...24AWG
6. OPEN/SHORT TEST: 100% TEST.
   A.100% OPEN,SHORT&INTERMITANCE TEST.
   B.CONDUCTOR RESISTANCE: 3ohms MAX:
   C.INSULATION RESISTANCE: 5M Min/,10ms:
7. ALL MUST BE ROHS COMPLIANT.

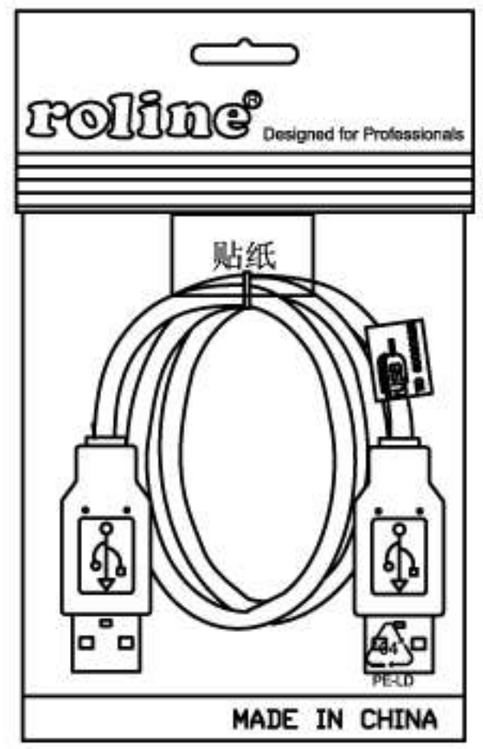

PE BAG(100*200*0.06)ROLINE HEADER+EAN STICKER

COMPANY	RLA		ITEM NO.	11.02.8908	NO	B4647	Parts Name	USBAM-USBAM		
REVISION	DATE	DISCRIPTION	DRAWN BY		SPEC	Rotronic Co.,Ltd.			SCALE	NON
REV.A/0	2012.05.08		DESIGNED BY						UNIT(mm)	
			APPROVAL BY						PAGE	