JALAS® 1728 ZENIT EASYROLL

EN ISO 20345:2011, S3 SRC



PROPERTIES
Highest level of protection, excellent grip, perfect fit, extra comfortable, extremely warm, excellent shock absorption

SPECIFICATION

TYPE OF SHOE **Safety footwear, boots/Ankle boots**

NAIL PROTECTION MATERIAL **Plasma-treated composite (PTC) textile**

FITTING **Regular**

SIZE RANGE **36-47**

COLLECTION **Zenit**

PLATFORM **Zenit**

UPPER MATERIAL **PU-coated leather, split leather**

PRONOSE MATERIAL **PU**

TOECAP MATERIAL **Aluminium**

LINING MATERIAL **Bio-ceramic fur, Meida® thermo insulation, aluminium foil**

SOLE MATERIAL **PU midsole, plastic shank, RPU outsole**

INSOLE **FX2 Winter**

INSOLE MATERIAL **Textile, aluminium foil, soft EVA, polyester-based conductive thread, merino wool, double shock absorption zones in Poron® XRD®**

FASTENING **Boa®**

COLOUR **Black, grey, red**

SIZE	ART. NO.	EAN NO.
36	1728-36	6408487501791
37	1728-37	6408487501807
38	1728-38	6408487501814
39	1728-39	6408487501821
40	1728-40	6408487501838
41	1728-41	6408487501845
42	1728-42	6408487501852
43	1728-43	6408487501869
44	1728-44	6408487501876
45	1728-45	6408487501883
46	1728-46	6408487501890
47	1728-47	6408487501906

The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2015-09-29

Finnish Institute of Occupational Health

SP Technical research institute of Sweden

JALAS® 1728 ZENIT EASYROLL

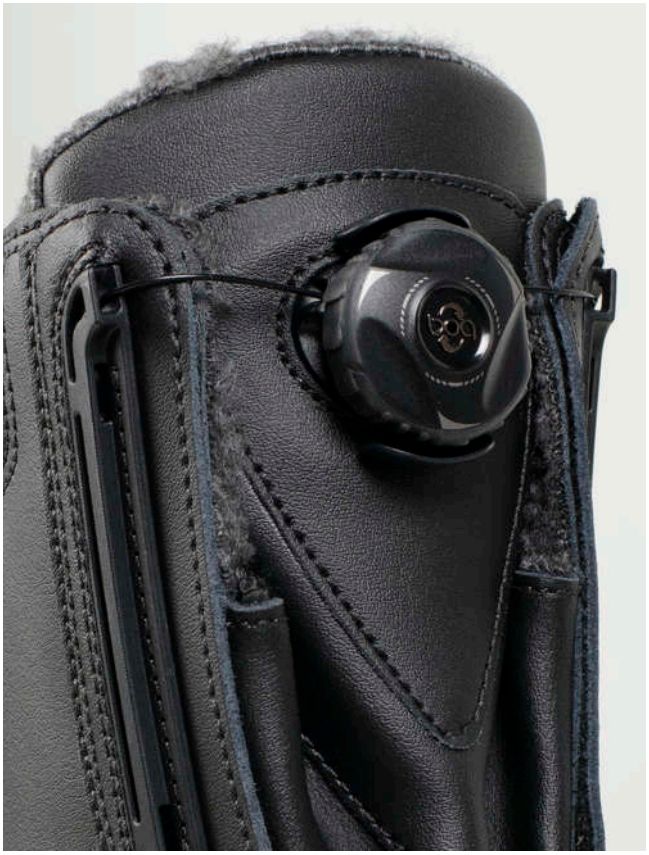

FEATURES
ProNose toe reinforcement, oil-resistant outsole, anti-static properties, padded boot shaft, Boa® closure system, quick-tie, stabilizator, pull loops, snow lock, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), antibacterial fibre – prevents odours

PRIMARY PROTECTION
Prevents risk of:, toe injuries, nail penetration, antistatic, contact with cold

PRIMARY ENVIRONMENTS OF USE
Outdoors, environments with risk for outsole penetration, cold environments, harsh environments

CE

- Aluminium toecap
- Stabilizator
- Nail protection in plasma-treated composite (PTC) textile
- Anti-static properties
- Water repellent
- ESD
- Oil-resistant outsole
- ProNose toe reinforcement
- Ergothan Shock Absorption System
- Winter model

The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2015-09-29

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB
Box 7, SE-793 21 Leksand, Sweden
Phone +46 (0) 247 360 00
Fax +46 (0) 247 360 10
info@ejendals.com
order@ejendals.com
www.ejendals.com

JALAS® 1728 ZENIT EASYROLL



COMPLIANCE
EN ISO 20345:2011

COMPLIANCE DESCRIPTION

SB: Footwear with toe protection tested with 200 J impact and 15kN compression force (includes oil resistant outsole)

S1: Footwear made from leather and other materials excluding all-rubber or all-polymeric footwear + closed seat region + SB + A + E

S2: S1 + WRU

S3: S2 + P

WRU: Water-resistant upper

P: Penetration-resistant outsole

A: Electrical resistance (between 0.1-1000 Mega Ohms

E: Energy absorption in the heel area (tested at 20 Joules)

SRA: Slip-resistance on ceramic tile floor with Sodium lauryl sulphate solution

SRB: Slip-resistance on steel floor with glycerol

SRC: SRA + SRB

IEC 61340-5-1: Electrostatic Discharge (ESD) resistance below 35 megaohm

BGR 191: Orthopedic footwear adjustment according to German BGR 191. Footwear is tested with adjusted orthopedic insoles in accordance with EN ISO 20345 standard

CE

- Aluminium toecap
- Stabilizator
- Nail protection in plasma-treated composite (PTC) textile
- Anti-static properties
- Water repellent
- ESD
- Oil-resistant outsole
- ProNose toe reinforcement
- Ergothan Shock Absorption System
- Winter model

The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2015-09-29

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB
Box 7, SE-793 21 Leksand, Sweden
Phone +46 (0) 247 360 00
Fax +46 (0) 247 360 10
info@ejendals.com
order@ejendals.com
www.ejendals.com