HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Crocodile clips

MA 2 VA



CE

2 mm system

Product	MA 2 VA
description	Miniature alligator clip with high strength insulation and 2 mm socket connection. Jaws and spring in stainless steel. The flat part of the jaws (fine wire section) allows a secure contact to be made when clamping even the thinnest wires. Capable of clamping flat components (soldering eyes) and wires up to a maximum diameter of 4 mm.
operating instruction	BA210
article-no. / *colour	9303191xx 00 black, 01 red, 02 blue, 03 yellow, 04 green, 06 gray, 07 white
drawing	
	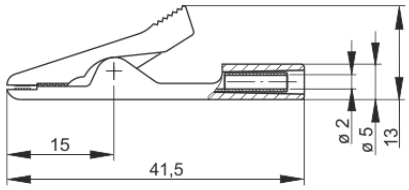
technical data	
connection	2 mm socket
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	6 A
material socket	stainless steel
housing material	PP
temperature range acc. To IEC61010(2)	-25 °C to 70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamping range	4 mm

(1) for normal environmental conditions 5°C to 40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022