
**Sicherheits-Abgreifklemme**
- isoliert
- Steckanschluss Ø 2 mm
- Kontakt: Krokodilklauen

**Best.-Nr. SAK 6715 Ni / 2 /** ..(Farbe)
- Kontaktteile **vernickelt**
- Isolierteile PA 6.6 (Polyamid)
- Klemmbereich Ø 8 mm
- **Farben** siehe Tabelle

***Safety crocodile clip***
- *insulated*
- *socket Ø 2 mm*
- *contact: crocodile jaws*

***Order No. SAK 6715 Ni / 2 /*** *..(colour)*
- *contact parts* ***nickel-plated***
- *insulation* *PA 6.6 (Polyamid)*
- *grips up to* *Ø 8 mm*
- ***colours*** *see table*

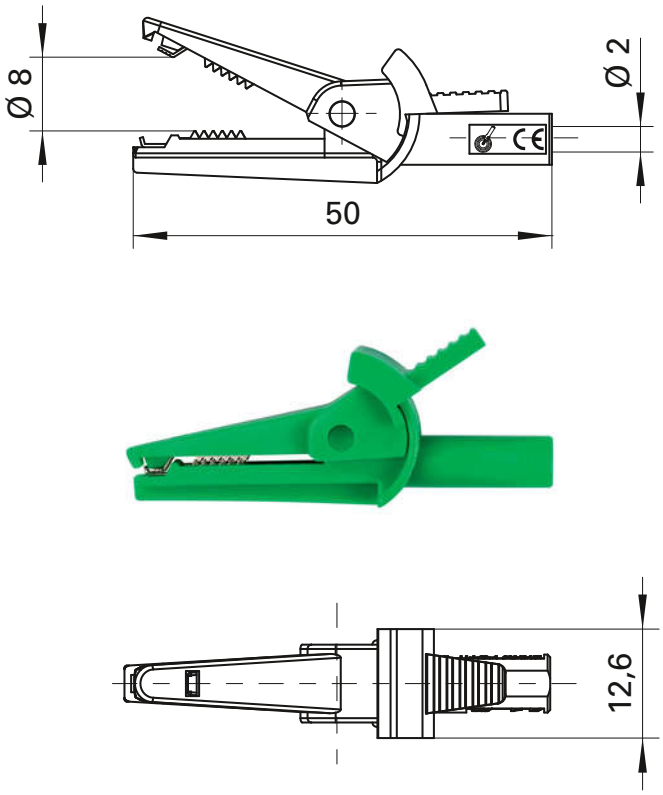


| **Allgemeine Angaben** | |
|---|---|
| **Best.-Nr.** [1] | **SAK 6715 Ni / 2 /** ..(Farbe)<br>Kontaktteile vernickelt |
| Farben | schwarz, rot, blau, gelb, grün, weiß |
| **Technische Daten** | |
| Anschluss | Sicherheitsbuchse |
| Durchgangswiderstand | 15 mΩ |
| Bemessungsspannung [2] | 600 V CAT II |
| Bemessungsstrom [2] | 10 A |
| Betriebstemperatur | von -25 °C bis +80 °C |

| ***General information*** | |
|---|---|
| ***Order No.*** [1] | ***SAK 6715 Ni / 2 /*** *..(colour)*<br>*contact parts nickel-plated* |
| *colours* | *black, red, blue, yellow, green, white* |
| ***Technical data*** | |
| *terminal* | *safety socket* |
| *transition resistance* | *15 mΩ* |
| *rated voltage* [2] | *600 V CAT II* |
| *rated current* [2] | *10 A* |
| *operating temperature* | *from -25 °C to +80 °C* |

[1] andere Farben auf Anfrage
[2] bei normalen Umgebungstemperaturen

[1] *other colours on request*
[2] *at normal ambient temperatures*