Technical Specifications

Anchorage point




Description:

Anchorage point with fall indicator, stainless steel
for fixation point Ø 13 mm

References:

1002996 for the anchorage device
1003273 (with nut / bolt)
1003272 (with chemical bolt)

Features:

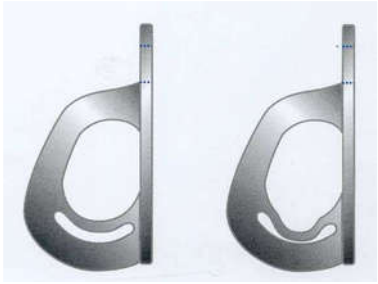

1002996 :


Material : Stainless steel 316 L
Fixation hole : Ø 13mm
Weight : 0.062 Kg
Maxi. effort (before collapse) : 300daN
Breaking strength: > 2000 daN

1003273 :

Screw : stainless steel 12x50
+Bolt PAL M12 Stainless Steel A2
& bolt H M12 Stainless Steel A2


Weight: 0.137 kg
Maxi. effort (before collapse) : 300daN
Breaking strength: > 2000 daN

SAFE To be checked



1003272 :

Chemical Bolt : HVU-R M12
Résine Uréthane Méthacrylate + Cheville Inoxydable
Security bolt PAL M12 Stainless Steel A2
Bolt H M12 Stainless Steel A2
Weight : 0.219 kg
Breaking strength : > 2000 daN
Maxi. effort (before collapse) : 300daN
EN 795 class A1



LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.
For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.honeywellsafety.com