

RoHS Compliant

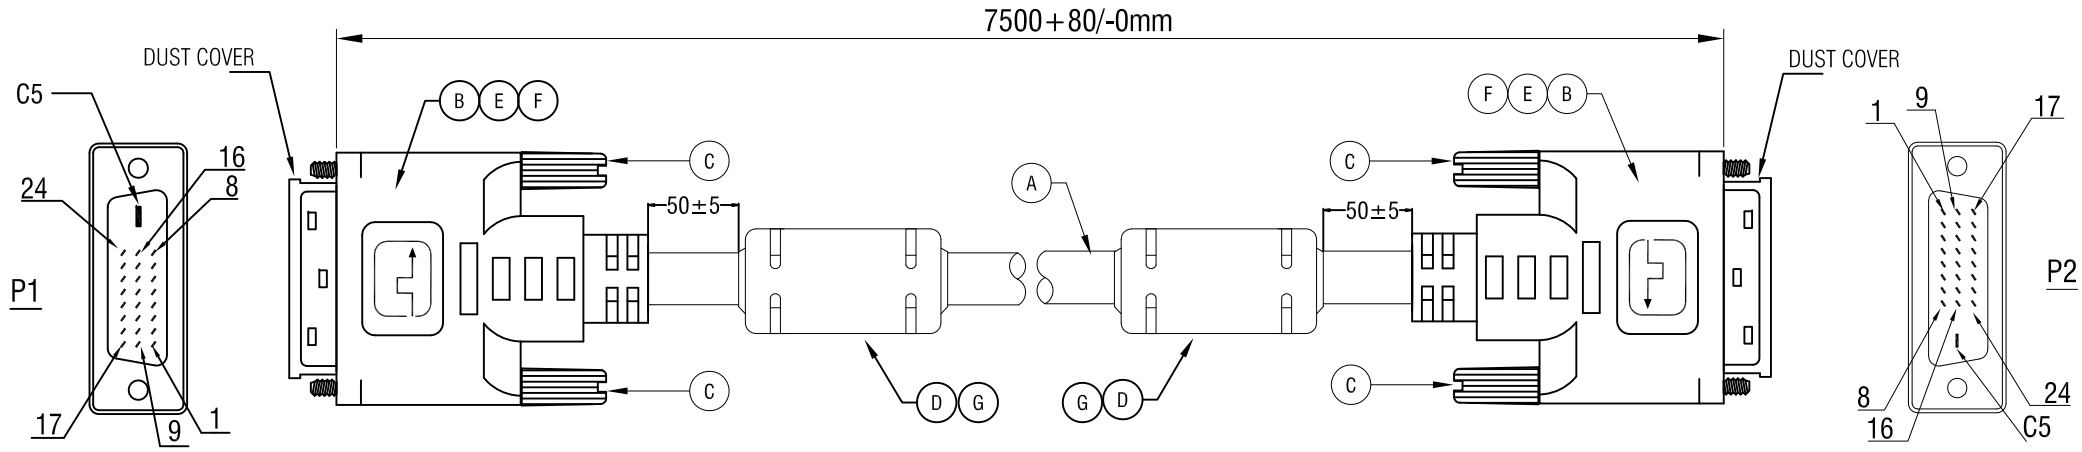

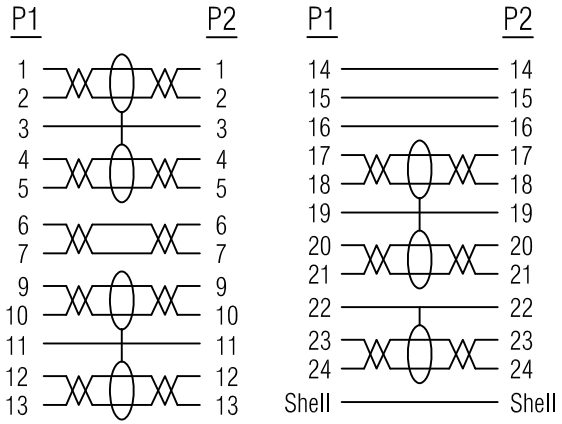

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:15Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.
5.Real Test Passed 2560*1600P 60HZ
6.Real Test Not Twinkling,Double Vision and Decolor.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
G	45P BLACK PVC		G
F	DVI SHELL(30P BLACK PVC)	2	PCS
E	DVI SPTE	2	PCS
D	FERRITE(17.5*10.5*28.5mm)BLACK	2	PCS
C	Screw : #4-40UNC(Nickel Plated,BLACK MOLDING)	4	PCS
B	DVI24+1 MALE (Black Insulator,Nickel Plated)	2	PCS
A	UL20276[28#*1P(CCS)+DAM]*7C+28#*1P(BC)+28#*2C(BC)+26#*1C(BC)+ADB,OD=8.5, BLACK PVC JACKET	1	PCS

ROLINE Monitor Cable, DVI M - DVI M, (24+1) dual link, 7.5m

Item	11.04.5556	
Draw	Kobe	Date: 2020.03.09
Approval		
Duty	F16	BOM.NO: 13870
Sample NO.		Drawings of 1-(2) Proportion: 1:1 Unit(mm) A4

SECOMP