
Inductive Sensors



CP40 - Embeddable/Nonembeddable, Terminal Chamber

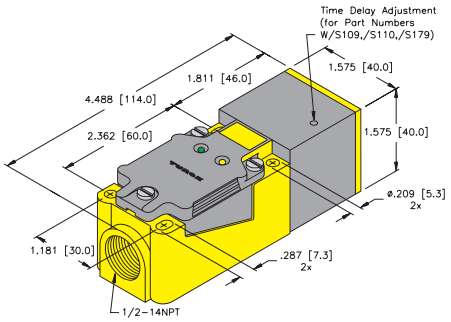

Housing Style - Rectangular	Part Number	ID Number	Features	Embeddable	Sensing Range (mm)	Output
	Bi15-CP40-VN4X2/S109	M1526900	*Time Delay*	•	15	4-Wire NPN
	Ni20-CP40-VN4X2/S109	M1527100	*Time Delay*		20	
	Bi15-CP40-VP4X2/S109	M1504721	*Time Delay*	•	15	4-Wire PNP
	Ni30-CP40-VP4X2/S109	M1512521	*Time Delay*		30	
	Bi15-CP40-VN4X2/S110	M1527000	*Time Delay*	•	15	4-Wire NPN
	Ni20-CP40-VN4X2/S110	M1527300	*Time Delay*		20	
	Bi15-CP40-VP4X2/S110	M1509821	*Time Delay*	•	15	4-Wire PNP
	Ni20-CP40-VP4X2/S110	M1509921	*Time Delay*		20	
	Bi15-CP40-FDZ30X2	M4224100	Prog. Outputs	•	15	2-Wire AC/DC
	Bi15-CP40-FDZ30X2/S34	M4226100	*WFI*	•	15	
	Bi15-CP40-FDZ30X2/S97	M4226600	*Low Temp -40°C*	•	15	
	Bi15U-CP40-FDZ30X2	M4280601	*Uprox*	•	15	
	Ni20-CP40-FDZ30X2	M4224200	Prog. Outputs		20	
	Ni35-CP40-FDZ30X2	M4224500	Prog. Outputs		35	
	Ni40U-CP40-FDZ30X2	M4280801	*Uprox*		40	
	Bi15-CP40-FZ3X2	M1341000	Prog. Outputs	•	15	2-Wire AC/DC
	Bi15-CP40-FZ3X2/S97	M1341010	*Low Temp. -40°C*	•	15	
	Bi15-CP40-FZ3X2/S100	M1377600	*High Temp. 100°C*	•	15	
	Ni20-CP40-FZ3X2	M1341100	Prog. Outputs		20	
	Ni20-CP40-FZ3X2/S100	M1377500	*High Temp. 100°C*		20	
	Ni20NF-CP40-FZ3X2	M1378200	Prog. Outputs		20	
	Ni35-CP40-FZ3X2	M1341300	Prog. Outputs		35	
	Ni40-CP40-FZ3X2/S100	M1374802	*High Temp. 100°C*			
	Bi15-CP40-FZ3X2/S109	M1373700	*Time Delay*	•	15	2-Wire AC
	Bi15-CP40-FZ3X2/S110	M1373500	*Time Delay*	•	15	
	Ni20-CP40-FZ3X2/S109	M1374500	*Time Delay*		20	
	Ni20-CP40-FZ3X2/S110	M1374600	*Time Delay*		20	
	Ni30-CP40-FZ3X2/S109	M1374700	*Time Delay*		30	
	Ni30-CP40-FZ3X2/S110	M1374400	*Time Delay*		30	
	Bi15-CP40-VDZ3X2	M4222700	*Comp. Outputs*	•	15	4-Wire AC/DC
	Bi15-CP40-Y1X	M1012000		•	15	NAMUR
	Ni20-CP40-Y1X	M1012100			20	

WFI = Weld-Field Immune Sensors.
"/S109" Designates on Delay.
"/S110" Designates off Delay.

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Front Cap/Face	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #
10-65 VDC	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	1
	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	1
10-65 VDC	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	2
	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	2
10-65 VDC	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	1
	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	1
10-65 VDC	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	2
	- -	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	2
10-300 VDC 20-250 VAC	60	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	3
	30	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	3
	60	≤400/300	-40 to +70	IP 67	PBT	PBT	GN	YE	- - - -	3
	60	≤400/300	-30 to +85	IP 67	PBT	PBT	GN	YE	- - - -	3
	60	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	3
	60	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	3
	60	≤400/300	-30 to +85	IP 67	PBT	PBT	GN	YE	- - - -	3
10-300 VDC 20-250 VAC	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-40 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +100	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +100	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	0 to +60	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +100	IP 67	PBT	PBT	GN	YE	- - - -	4
20-250 VAC	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
	20	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
20-250 VAC 20-320 VDC	30	≤400/300	-25 to +70	IP 67	PBT	PBT	GN	YE	- - - -	4
5-30 VDC	150	Remote	-25 to +70	IP 67	PBT	PBT	N/A	YE	- - - -	5
	150	Remote	-25 to +70	IP 67	PBT	PBT	N/A	YE	- - - -	5

Wiring Diagrams

Diagram 1




Diagram 2




Diagram 3




Diagram 4






Diagram 5



WIRING DIAGRAM



SHORT-CIRCUIT AND OVERLOAD PROTECTED

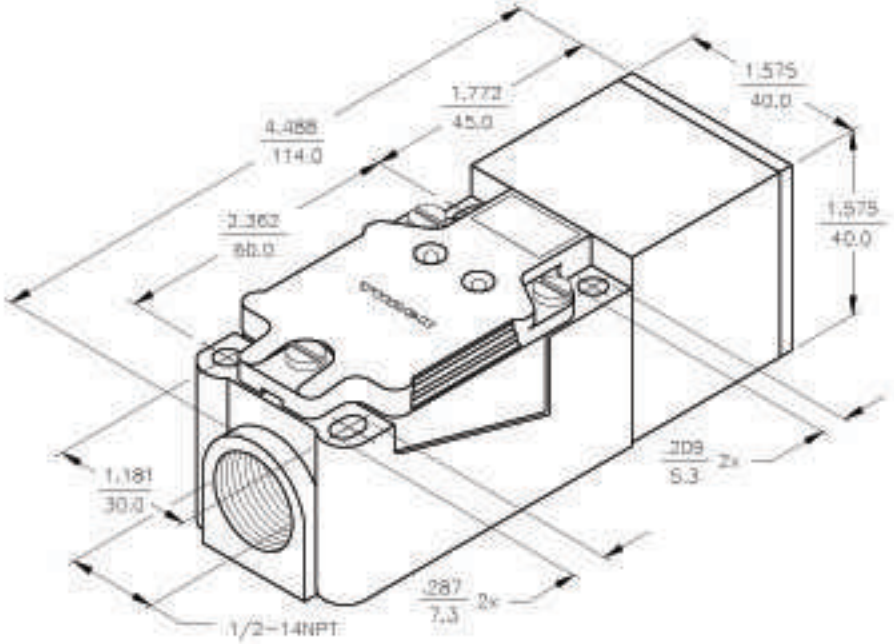

SPECIFICATIONS

OPERATING VOLTAGE	20-250 VAC/DC
LINE FREQUENCY	40-60 Hz
HYSTERESIS (DIFFERENTIAL TRAVEL)	3-15% (5% TYPICAL)
VOLTAGE DROP ACROSS CONDUCTING SENSOR	≤6.0 V at 400 mA
OUTPUT FUNCTION	CONNECTION PROGRAMMABLE NORMALLY OPEN OR NORMALLY CLOSED
SHORT-CIRCUIT PROTECTED	YES
TRIGGER CURRENT FOR OVERLOAD PROTECTION	≥500 mA
CONTINUOUS LOAD CURRENT	≤400 mA
LEAKAGE (OFF-STATE) CURRENT	≤1.7 mA
MINIMUM LOAD CURRENT	≥3.0 mA
INRUSH CURRENT	≤3.0 A (≤20 ms/5 Hz)
TIME DELAY BEFORE AVAILABILITY	≤30 ms
POWER-ON EFFECT PROTECTION	INCORPORATED
PROTECTION AGAINST TRANSIENTS	5 kV, 10 ms, 10 kΩ
OPERATING TEMPERATURE	-25°C to +70°C (-13°F to +158°F)
ENCLOSURE	MEETS NEMA 1, 3, 4, 6, 13 AND IEC IP67
SHOCK	30 g, 11 ms
VIBRATION	55 Hz, 1 mm AMPLITUDE (IN ALL 3 PLANES)
LED FUNCTION	GREEN: STEADY = POWER ON FLASHING = SHORT-CIRCUIT WARNING RED: OUTPUT ENERGIZED
SENSING RANGE	15 mm = .591" (NOMINAL)
SWITCHING FREQUENCY	150 Hz
REPEATABILITY	≤2% of NOMINAL SENSING RANGE
SHIELDED	YES

NOTE:

1. SENSING HEAD TURNS TO ACCOMMODATE 9 DIFFERENT SENSING POSITIONS.

REV	DESCRIPTION	BY	DATE	ECO NO
B	UPDATE TO CURRENT TITLE BLOCK	RDS	09/12/03	5504

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls

MATERIAL: PBT-GF30-V0 PLASTIC

FINISH:

TOLERANCES UNLESS OTHERWISE SPECIFIED
.X ±0.05
.XX ±0.01
.XXX ±0.005
ANGLES ±1°
ALL MILLIMETER DIMENSIONS ARE REFERENCE ONLY

DRT: SMW
DATE: 10/21/87
DSGN:
SCALE: NONE

UNIT OF MEASUREMENT
INCH [MILLIMETER]
DO NOT SCALE THIS DRAWING

DESCRIPTION: Bi15-CP40-FDZ30X2

IDENTIFICATION NO.: M4224100

REV: B

FILE: M4224100

SHEET 1 OF 1