


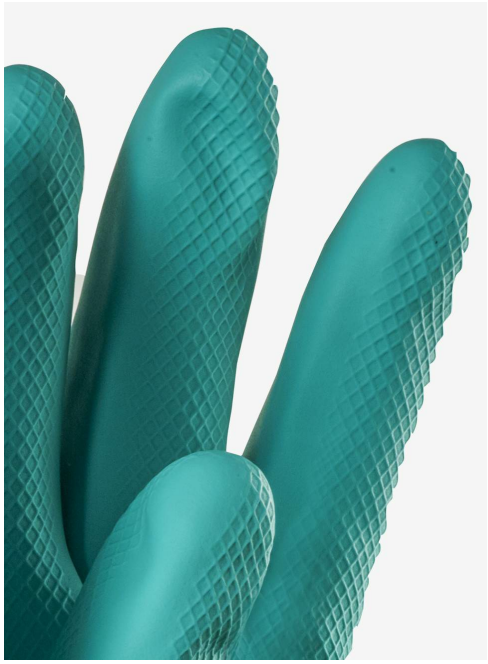

TEGERA® 47A

Learn more

FLOCK LINED THICKER NITRILE GLOVE

An all-round classic chemical protection nitrile glove useful in several environments from household to manufacturing. Slightly thicker, 0,45mm, which means increased protection. Flock-lined and good grip due to diamonds structure. Latex-free for reduced risk of allergy.

CHARACTERISTICS

- High level of protection
- Good fit
- Durable
- Good grip
- Comfortable

FUNCTIONS

- Waterproof
- Approved for handling foodstuffs
- Protection against chemicals
- Latex-free
- Oil and grease resistant

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF

Corrosive injuries, contact with chemicals, contact with moisture, contact with damp, contact with oil and fat

PRIMARY ENVIRONMENTS OF USE

Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, dirty environments, harsh environments

PRIMARY AREAS OF USE

Agricultural work, petro-chemical work, chemical work, chemical technology work, laboratory work, paint spraying work, paper industry work, decontamination, sanitation, cleaning

PRIMARY INDUSTRIES OF USE

Agriculture, oil, gas, petrochemical, pulp and paper, chemical, rubber and plastic, automotive

TYPE OF WORK

Medium weight

CHEMICAL RESISTANCE

According to EN16523-1:2015. For details, please contact Ejendals.

SPECIFICATION

TYPE Chemical protection gloves
CATEGORY Cat. III
THICKNESS 0,45 mm
LENGTH 330 mm
DEXTERITY 5
INSIDE Flock-lined
GRIP DESIGN Diamond grip pattern
COLOUR Green
PAIRS PER: BUNDLE/CARTON 10/100
DISPLAY TYPE Bag with euro slot
DIPPING MATERIAL Nitrile

COMPLIANCE

CE 0598 UKCA 0120 EAC

TP TC 019:2011

Information/UIS

EN ISO 374-1:2016/Type A JKLNOT

EN ISO 374-5:2016

EN 388:2016+A1:2018 4001X

EN ISO 21420:2020

FEATURES

Waterproof

Chemical protection

TEST ACCORDING TO EN ISO 374-1:2016

Tested chemical	J	K	L	N	O	T
Permeation level	6	6	2	2	4	6
Degradation %	11,7	7,5	93,9	92,9	38,5	33,5

SIZE		ARTICLE NUMBER	EAN
7	S	47A-7	7340118356099
8	M	47A-8	7340118356211
9	L	47A-9	7340118356334
10	XL	47A-10	7340118356457
11	XXL	47A-11	7340118356570

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.