
HEAR NO EVIL

VAN DAMME TOUR GRADE CLASSIC XKE PRO-PATCH CABLE



Van Damme Pro Grade Classic XKE Pro-patch cable has been specifically designed as a 4.85mm overall diameter cable to suit Neutrik and Switchcraft bantam jacks, and other applications requiring a lower OD cable. Its braided screen and tightly packed construction ensure that the smaller size in no way compromises the mechanical and sonic integrity.

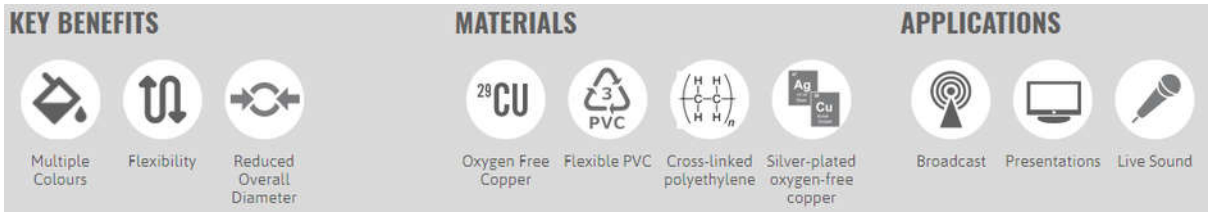

www.van-damme.com

HEAR NO EVIL

Applications

- For mic and line level analogue balanced audio
- Bantam patch cords and bantam adaptor cables
- Shorter mic cables and XLR splitter cables
- Midi leads and other DIN connector applications

Application Notes

- Further improved outer jacket ensures cable remains flexible in sub-zero temperatures
- Tightly packed cotton fillers ensure no static build up and even capacitance
- Available in 10 colours for application or length colour coding
- 95% optical coverage braided screen for excellent mechanical strength and EMI/RFI rejection
- Combination of silver plated and plain ultra-pure oxygen free copper conductors for unsurpassed sound quality

Mechanical Specification

Conductors	7 x 0.10 mm silver plated ultra-pure oxygen-free copper 21 x 0.10 mm bare ultra-pure oxygen-free copper
Conductor size	28 x 0.10 mm, 0.22 mm^2, AWG 24/28
Insulation	Cross-linked polyethylene (XLPE)
Insulation diameter	1.60 ± 0.10 mm
Colour Code	Red/Blue
Screen	96 x 0.10 mm braided tinned copper > 95% optical coverage
Jacket material	Flexible PVC/Neoprene composite
Overall diameter	4.85 ± 0.15 mm
Bend radius	10 x overall diameter
Operating temperature	-20 to +70 ^oC

Electrical Specification

Resistance	Conductor	< 85 Ohm/km
	Insulation	> 5000 MOhm/km
Capacitance	Core to core	50 pF/m
	Core to screen	95 pF/m

HEAR NO EVIL

Part Numbers and Description

Part Number	Description	RAL Code	Max. Reel Length
268-006-000	Van Damme Tour Grade XKE Pro-Patch jet black	RAL 9005	100 m
268-007-060	Van Damme Tour Grade XKE Pro-Patch ultramarine blue	RAL 5002	100 m
268-009-020	Van Damme Tour Grade XKE Pro-Patch traffic red	RAL 3020	100 m
268-004-050	Van Damme Tour Grade XKE Pro-Patch mint green	RAL 6029	100 m
268-018-080	Van Damme Tour Grade XKE Pro-Patch squirrel grey	RAL 7000	100 m
268-010-040	Van Damme Tour Grade XKE Pro-Patch sulphur yellow	RAL 1016	100 m
268-056-090	Van Damme Tour Grade XKE Pro-Patch traffic white	RAL 9016	100 m
268-058-030	Van Damme Tour Grade XKE Pro-Patch bright orange	RAL 2007	100 m
268-060-010	Van Damme Tour Grade XKE Pro-Patch nut brown	RAL 8011	100 m
268-062-070	Van Damme Tour Grade XKE Pro-Patch signal violet	RAL 4008	100 m

Standards and Compliance

RoHS 2011/65/EU	Restriction of Hazardous Substances
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals