

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✔

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/13/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, AND 4 M	12/1/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/13/12	DFP

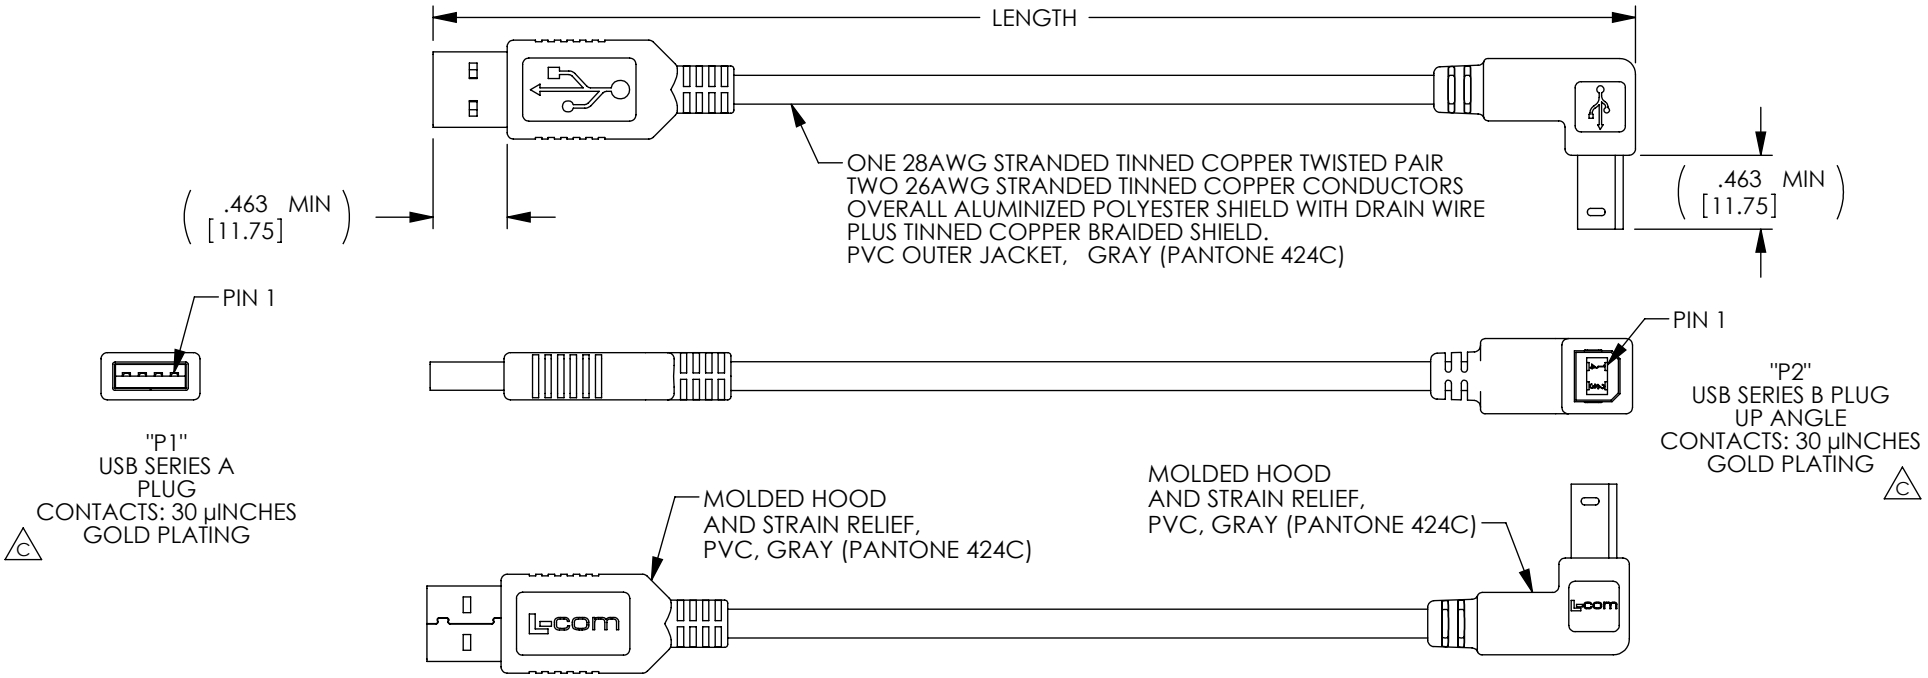

PART NUMBER	LENGTH	
	METERS	FEET
CAA-90UB-03M	0.3	.98
CAA-90UB-05M	0.5	1.64
CAA-90UB-075M	0.75	2.46
CAA-90UB-1M	1.0	3.28
CAA-90UB-2M	2.0	6.56
CAA-90UB-3M	3.0	9.84
CAA-90UB-4M	4.0	13.12
CAA-90UB-5M	5.0	16.40

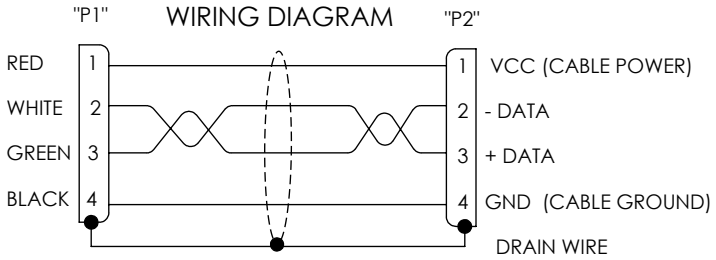

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. CASTRO	9/29/10
CHECKED BY D. PARHAM	9/30/10
APPROVED BY S. SMITH	9/30/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CA USB STR A/90UP B DX

SIZE A | FSCM NO. 43321 | DWG. NO. CAA-90UB | REV. C

SCALE: NONE | CAD FILE: CAA-90UB.SLDDRW | SHEET 1 OF 1