# MC55 High IO-Link Beacon RM




| | |
|---|---|
| **Part No.:** | **240.610.00** |
| **Series:** | **MC55** |

| **MECHANICAL DATA** | |
|---|---|
| Height | 111 mm |
| Diameter | 55 mm |
| Materials | PC |
| Dome colour | White |
| Housing colour | Black |
| Protection category | IP65<br>IP69K |
| Connection | M12 plug 4-pole |
| Type of fixing | Base mounting<br>Tube mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 121 g |
| Product weight | 92 g |
| IK-Code (IEC 62262) | IK06 |

| **ELECTRICAL DATA** | |
|---|---|
| Operating voltage | 18-30V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 0% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 55 mA |
| Rated inrush current | 350 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3<br>In the connection area: 2 |
| Overvoltage category | I |
| insulation voltage | Ui = 50V / Uimp = 330V |
| connectivity | IO-Link |

| **OPTICAL DATA** | |
|---|---|
| Light source | LED |
| Light colour | MC >1.000.000 colours |
| Optical signal image | multi function |
| Blink frequency | Configurable |
| Service life optical | 50,000 h maximum |

| **APPROVAL DATA** | |
|---|---|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


# MC55 High IO-Link Beacon RM

| | |
|---|---|
| WEEE | Yes |
| Conforms with RED directive | No |
| Conforms with ATEX-directive | No |
| Conforms with CCC-Ex | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 4X |
| Conforms with FCC | No |
| Conforms with ISED | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | 25 years |
| Conforms with VdS | No |
| MTTFd-value [years] | 541 |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

# MC55 High IO-Link Beacon RM

**DRAWING**

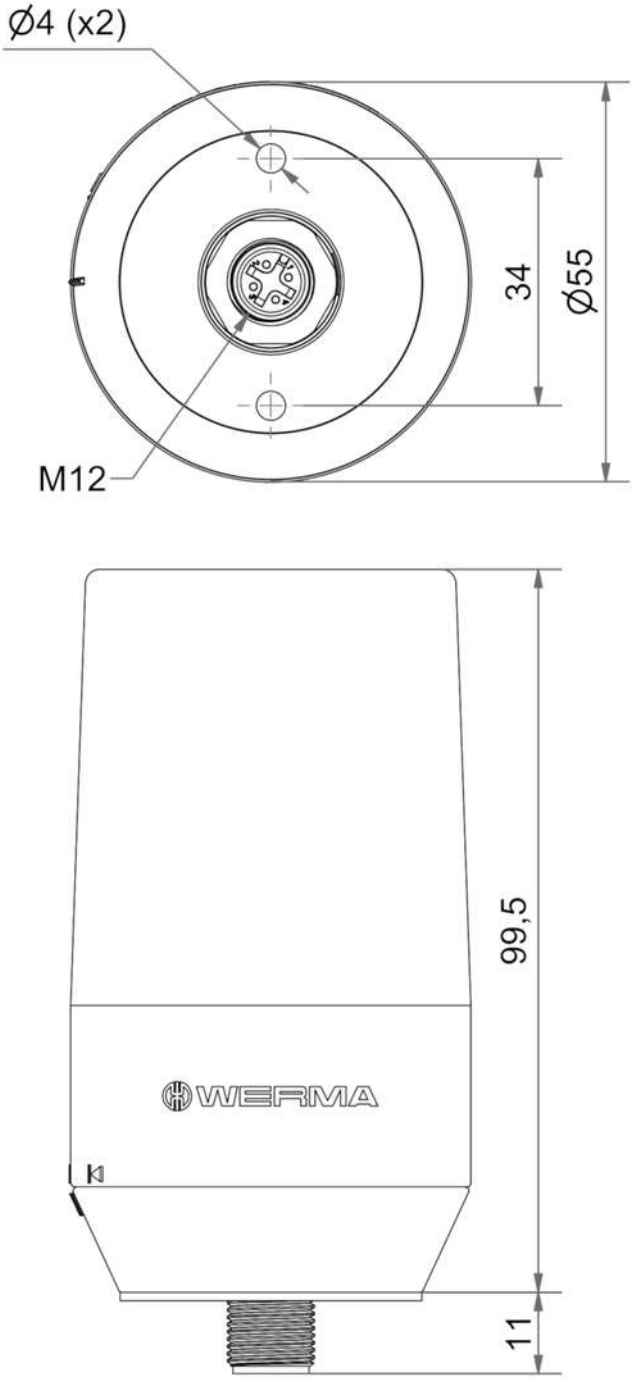


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.