User configurable plugs and sockets

Plugs LQ-4... LM-4...

Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads.


Various types of connection:
LM-4...: Screw connection
LQ-4...: Cross hole for solder connection

L...-4N-...



L...-4A-...



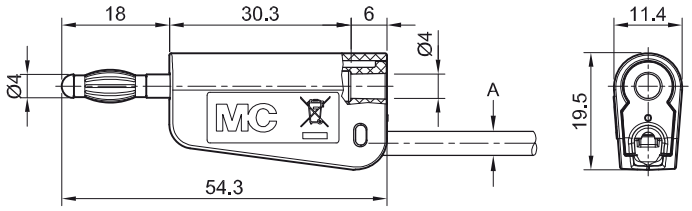

Order No.	Type	Rated voltage/current	Lead (A)		*Standard colors
64.1038-*	LQ-4N-30	AC 30 V/19 A DC 60 V/19 A	PVC Ø 2.7 mm SIL Ø 3.0 mm	1.0 mm²	Ni 20 21 22 23 24 25 26 27 28 29
64.1039-*	LQ-4A-30				Au
64.1040-*	LM-4N-30				Ni
64.1041-*	LM-4A-30				Au
64.1042-*	LQ-4N-39	AC 30 V/32 A DC 60 V/32 A	PVC Ø 3.6 mm SIL Ø 3.9 mm	2.5 mm²	Ni 20 21 22 23 24 25 26 27 28 29
64.1043-*	LQ-4A-39				Au
64.1044-*	LM-4N-39				Ni
64.1045-*	LM-4A-39				Au

Component parts

64.1046-*	KT-L-4-30	Connection sleeve suitable for	LQ-4N-30; LQ-4A-30; LM-4N-30; LM-4A-30
64.1047-*	KT-L-4-39	Connection sleeve suitable for	LQ-4N-39; LQ-4A-39; LM-4N-39; LM-4A-39
64.1048	LS-LQ-4N	Plug suitable for	LQ-4N-30; LQ-4N-39
64.1049	LS-LQ-4A	Plug suitable for	LQ-4A-30; LQ-4A-39
64.1050	LS-LM-4N	Plug suitable for	LM-4N-30; LM-4N-39
64.1051	LS-LM-4A	Plug suitable for	LM-4A-30; LM-4A-39

MA

Assembly instructions MA167

www.staubli.com/electrical