MURR ELEKTRONIK
stay connected

SVS Eco valve plug BI-11mm screw terminal


2-pol. + PE, 0,5 - 1,5mm², 6 - 8mm, LED+VDR 24V


Form BI (11 mm)
24 V AC/DC ±15%
LED and VDR
metric
field-wireable
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



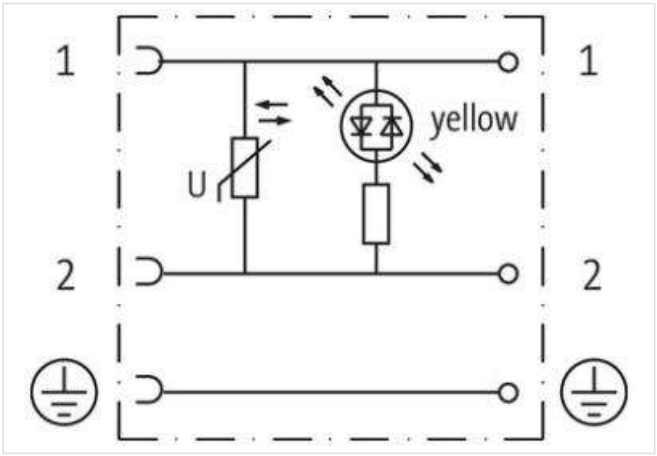

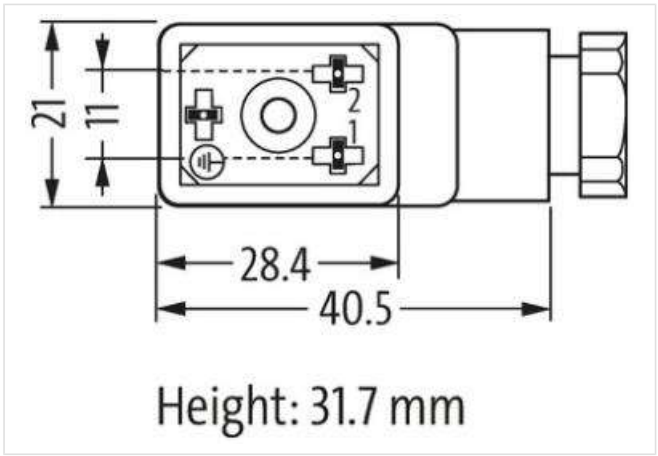

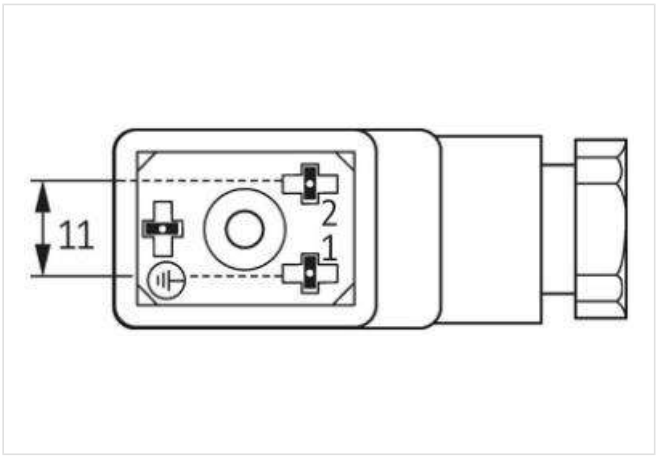

Product may differ from Image

Side 1

Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-01-31

MURR ELEKTRONIK
stay connected

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
customs tariff number	85366990
GTIN	4048879187183
Packaging unit	1
Electrical data | Supply	
Operating voltage AC	24 V
Operating voltage AC min.	20,4 V
Operating voltage AC max.	26,4 V
Operating voltage DC	24 V
Operating voltage DC min.	20,4 V
Operating voltage DC max.	26,4 V
Current operating per contact max.	1,5 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section min.	0,5 mm²
Connection cross section max.	1,5 mm²
Installation | Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M16 x 1.5
Installation | Pin assignment	
No. of poles	2 + PE
Device protection | Electrical	
Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor
Mechanical data | Material data	
Color housing	opaque
Material gasket	NBR
Material housing	PA
Mechanical data | Mounting data	
fastening screw	M3
Clamping range min.	6 mm
Clamping range max.	8 mm
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-01-31