

ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

CUSTOMER'S APPROVAL: _____ DATE: _____

FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

Pb leadfree

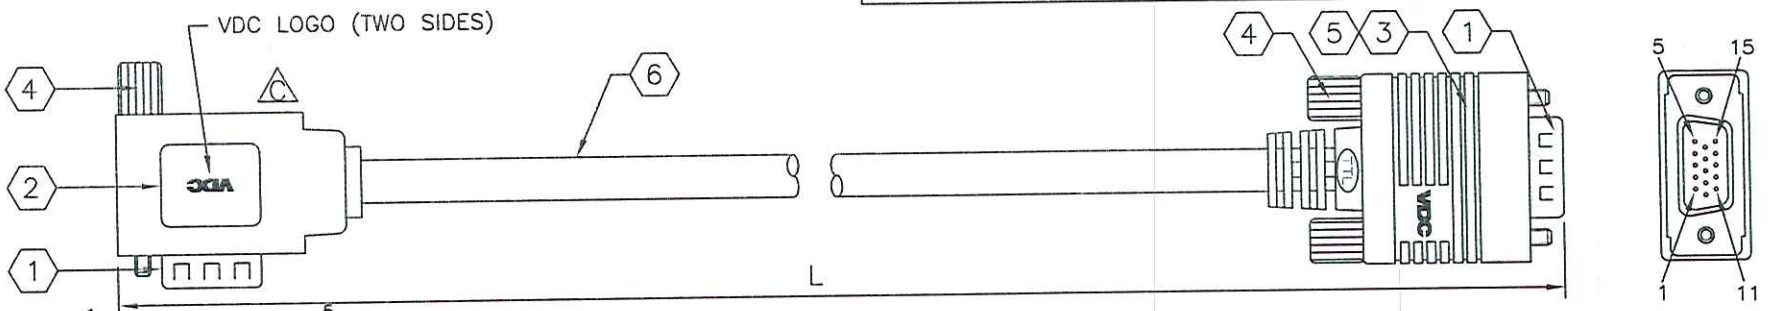



PINOUT CONFIGURATION

HD15 (90°C) MALE		HD15 MALE
1	Red Video	1
2	Green Video	2
3	Blue Video	3
4		4
5	Ground	5
6	Red Ground	6
7	Green Ground	7
8	Blue Ground	8
9	+5 VDC	9
10		10
11		11
12	DDC Serial Data Line	12
13	Horizontal Sync (or Composite Sync)	13
14	Vertical Sync	14
15	DDC Data Clock Line	15
SHELL	DRAIN+BRAID	SHELL

Farnell Code 1956298 - 1m
Farnell Code 1956299 - 3m
Farnell Code 1956300 - 5m

P/N	L±(mm)
104400401	1000±50
104400403	3000±100
104400405	5000±150

D

WIRE MARKING:
VDC LONDON WWW.VDCTRADING.COM
E193793 ℛU AWM 2919 80°C 30V VW-1

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR	2	PCS.
2	PANTONE BLUE 072U MOLDED PVC HOOD W/VDC LOGO (90°)	1	PCS.
3	PANTONE BLUE 072U MOLDED PVC HOOD W/VDC LOGO	1	PCS.
4	PANTONE BLUE 072U #4/40 THUMBSCREW	3	PCS.
5	PAT. NO.:US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	1	PCS.
6	UL2919 (28AWG COAX+AL-FOIL+65%BRAID+INNER JACKET)x3C	SEE	DWG.
	+(28AWG WIRE)x8C+AL-FOIL+DRAIN+BRAID OVERALL;		
	PANTONE BLUE 072U PVC JACKET		

C