



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
B8	F	ECO-12340	06/20/2023	SREITER	DGUST

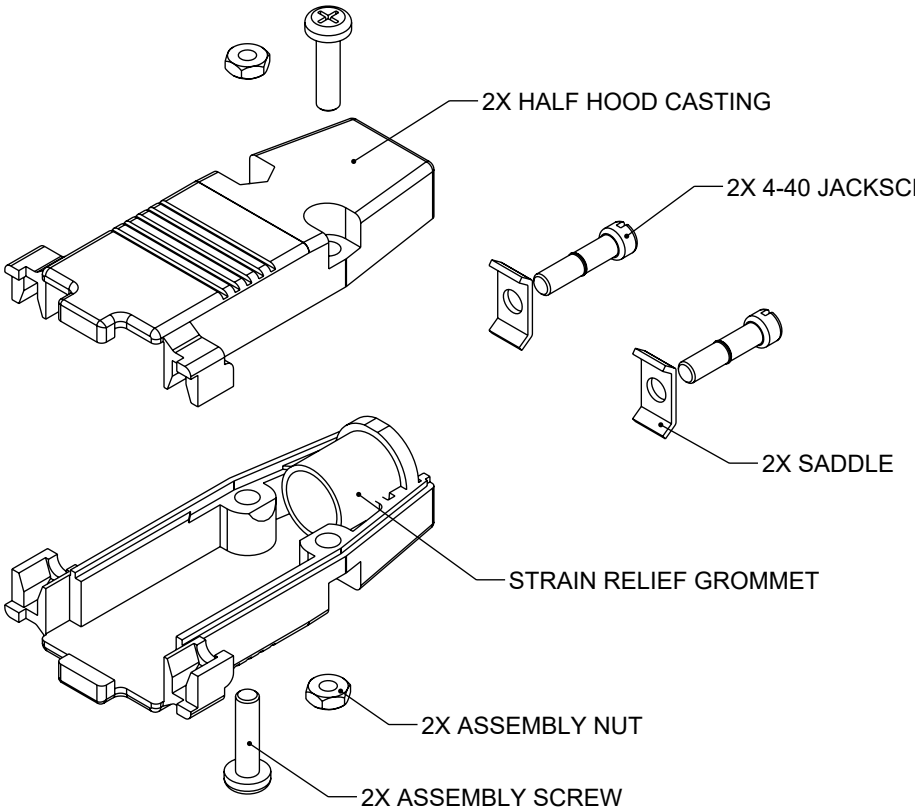


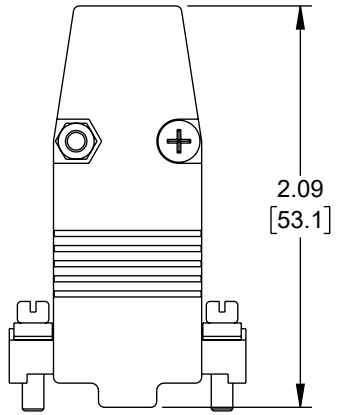



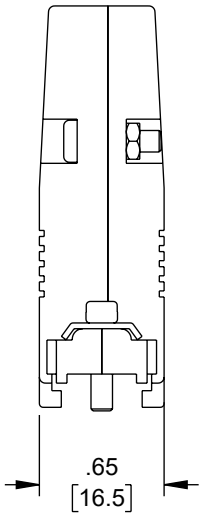



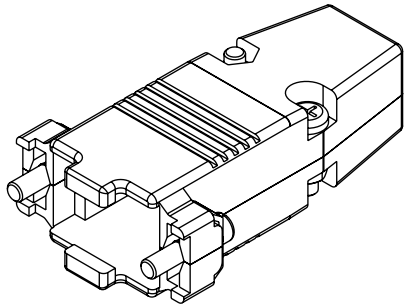

NOTES:

MATERIAL:
HOOD: DIE-CAST ZINC ALLOY
JACKSCREWS: STEEL OR STAINLESS STEEL
SADDLE & ASSEMBLY HARDWARE: STEEL OR STAINLESS STEEL
STRAIN RELIEF GROMMETS: PVC BLACK

FINISH:
HOOD: NICKEL PLATED, MATTE FINISH ON MAJOR SURFACES
JACKSCREWS: NICKEL PLATED; PASSIVATE IS OPTION FOR STAINLESS STEEL
SADDLE & ASSEMBLY HARDWARE: NICKEL PLATED; PASSIVATE IS OPTION FOR STAINLESS STEEL

MISCELLANEOUS:
INTENDED FOR USE WITH 9-PIN STANDARD AND 15-PIN HIGH DENSITY D-SUBMINIATURE CONNECTORS.
SUPPLIED WITH 5 STRAIN RELIEF GROMMETS FOR CABLES HAVING DIAMETERS RANGING FROM .190 TO .335 INCH.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5]
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
FRACTIONS ± 1/32
ANGLES ± 1°

THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY T CLARK	12/06/2004
CHECKED BY D PARHAM	12/07/2004
APPROVED BY C McCORMICK	12/08/2004

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

REF

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
D-SUBMINIATURE

PRODUCT DESCRIPTION
DB9 AND HD15 HOOD KIT

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	SDC9AG	F

SCALE: NONE | CAD FILE: SDC9AG.SLDDRW | SHEET 1 OF 1

T-Rev.D1