
QRC series
S9-M
Socket for miniature 4 pole relay C9-...


Type	**S9-M** 4-pole, 2 level ntegrated clip and marking label
Rated current	**6 A**


Specifications

Rated load	6 A/250 V
Insulation	Test voltage V rms 1 min
– All terminals/DIN rail	2,5 kV
– Terminal/terminal	2,5 kV
Cross-section of connecting wire	
– Single-wire	4 mm^2 or 2 x 2,5 mm^2
– Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C9
Labelling space	detachable
Connection label	1...14; DIN/EN
Mounting	DIN rail TS35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)....60 °C /-40 ... 80 °C


Socket for 4 poles, QRC relays	**C9-A, C9-E, C9-R**

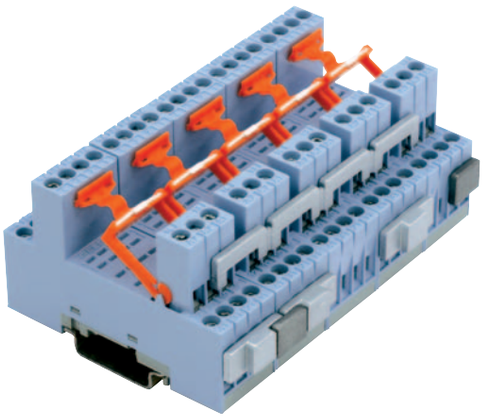

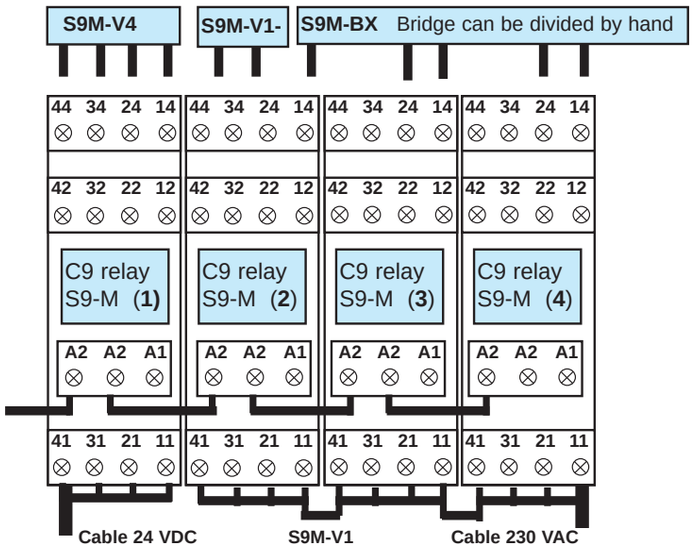


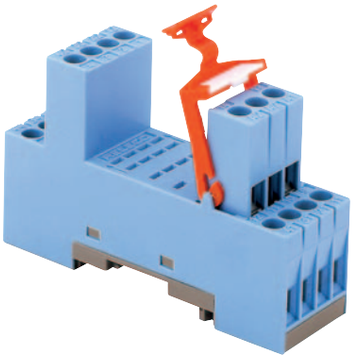


Connection diagram

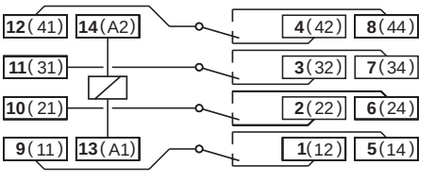

Dimensions [mm]

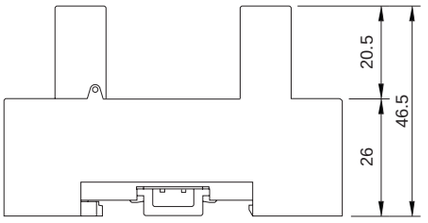

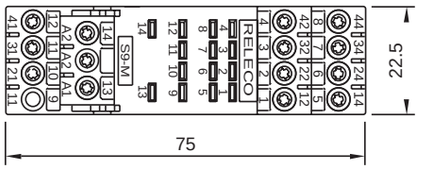

Technical approvals, conformities

Lloyd´s

D S FI N EN 60947-1, EN 61810-5