# MICO ELEC AUX CIRCUIT, 2 CHANNELS

IN: 24VDC OUT: 24V/1-2-3-4ADC


MICO 2.4
2 channels
Current adjustment 1, 2, 3, 4 A

Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)

## Link to Product


### Illustration



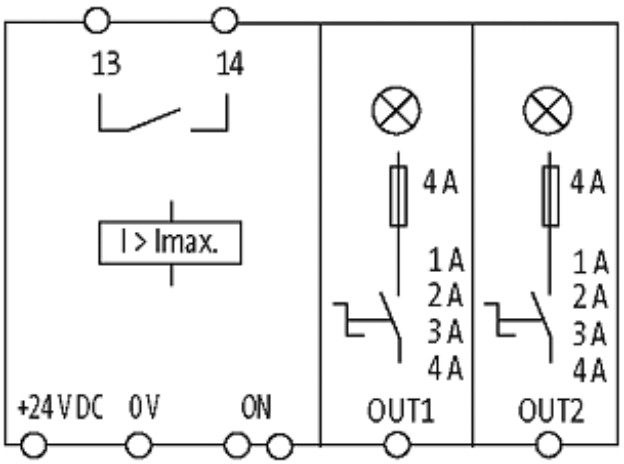


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/16

MURR ELEKTRONIK
stay connected

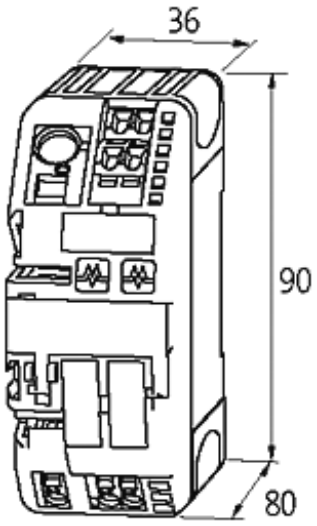


Product may differ from Image

## Approvals

## General data

| | |
|---|---|
| Connection | Spring clamp terminals |
| Input terminals | 1 × 16 mm² |
| Output terminals | per output 1 × 4 mm² |
| Alarm terminals | 2.5 mm² |
| Bridging concept | one side, with spring clamp terminals or bridge set (max. 40 A) |
| Mounting method | DIN-rail mountable TH35 (EN 60715) |
| Temperature range | 0...+55 °C (storage temperature -40...+80 °C) |

## Technical Data

| | |
|---|---|
| Operating voltage | 24 V DC (18...30 V DC) |
| Current adjustment | 1 A, 2 A, 3 A, 4 A, by countersinked rotary switch, sealed |
| Inrush capacity | max. 20 mF (per channel) |
| Group alarm output | potential free 30 V AC/DC, 100 mA |
| Remote start (ON) | 10...30 V DC |
| Impulse length | min. 20 ms |

## Commercial data

| | |
|---|---|
| country of origin | CZ |
| customs tariff number | 85363010 |
| EAN | 4048879064828 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/16

| | |
|---|---|
| eClass | 27141901 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/16