
Part Number: 1200845108
Status: Active
Overview: Brad Ultra-Lock Connection System
Description: Ultra-Lock (M12) Receptacle, 4 Poles, M16x1.5 Mounting Threads, Male (Straight) to 0.34mm² PVC Leads, 0.30m (11.81") Length

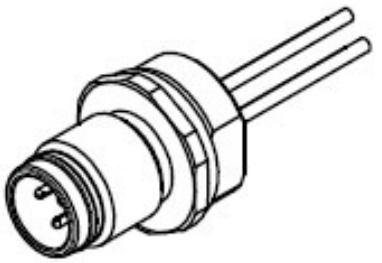

Series image - Reference only

Documents:
Drawing (PDF) RoHS Certificate of Compliance (PDF)

General	
Product Family	Industrial Receptacles
Series	120084
IP Rating	IP69K
NEMA Rating	NEMA 6
Overview	Brad Ultra-Lock Connection System
Product Name	Ultra-Lock (M12)
Type	Single Ended (pigtail)
UPC	883906778910
Physical	
Coupling Type	External Thread
Gender	Male
Keyway	Single
Length	0.30m
Material - Component	Nickel-plated Brass
Mounting Thread Size	M16 x 1.5
Net Weight	21.699/g
Orientation	Straight
Panel Mount	Front
Poles	4
Temperature Range - Operating	-25° to +90°C
Wire Size AWG	22
Wire/Cable Type	UL 1569
Electrical	
Current - Maximum per Contact	4.0A
Voltage - Maximum	60V
Material Info	
Engineering Number	WR4U26E03C3003
Reference - Drawing Numbers	
Sales Drawing	1200845108-000

EU ELV
Not Relevant

EU RoHS
Compliant with Exemption 6(c)

China RoHS

REACH SVHC
Contained Per - D(2021)10043-DC (17 Jan 2022)
Lead

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	50 Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
120084 Series