
Specifications:

Contact rating:	30V DC, 100 mA
Contact resistance:	< 500 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	100 V, 50 Hz for the duration of 1 minute
Operating temperature:	– 10 °C to + 60 °C
Operating force:	0.3 ± 0.1 N
Mechanical life:	minimum 50 000 operations
Material:	Contacts: phosphor-bronze, silver-plated Terminals: brass, silver-plated Case and actuator: PA46, black


Models: Switching functions

DT 106 C-P off – mom



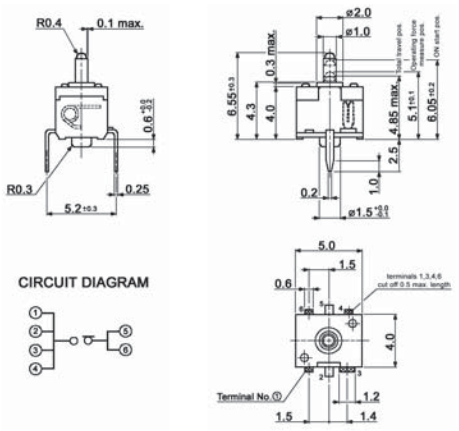

DTS 06 A-T off – mom

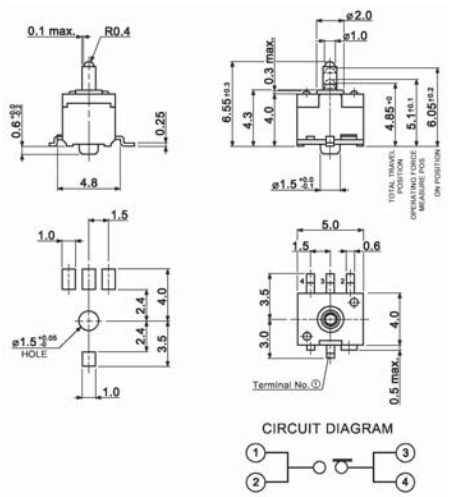



DTS 06 A1 C-T off – mom as DTS 06 A-T, but without posts



11