THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN
F	ECN 7220: CHG'D TPU TO LSZH, ADDED ROHS	1/7/14	D.FRISIELLO
G	ECN 10804:UPT CABLE; ADD CABLE OD, FLAME RATING, TEMP. RANGE&LSZH IEC STANDARDS	11/23/2020	MMARTINEZ

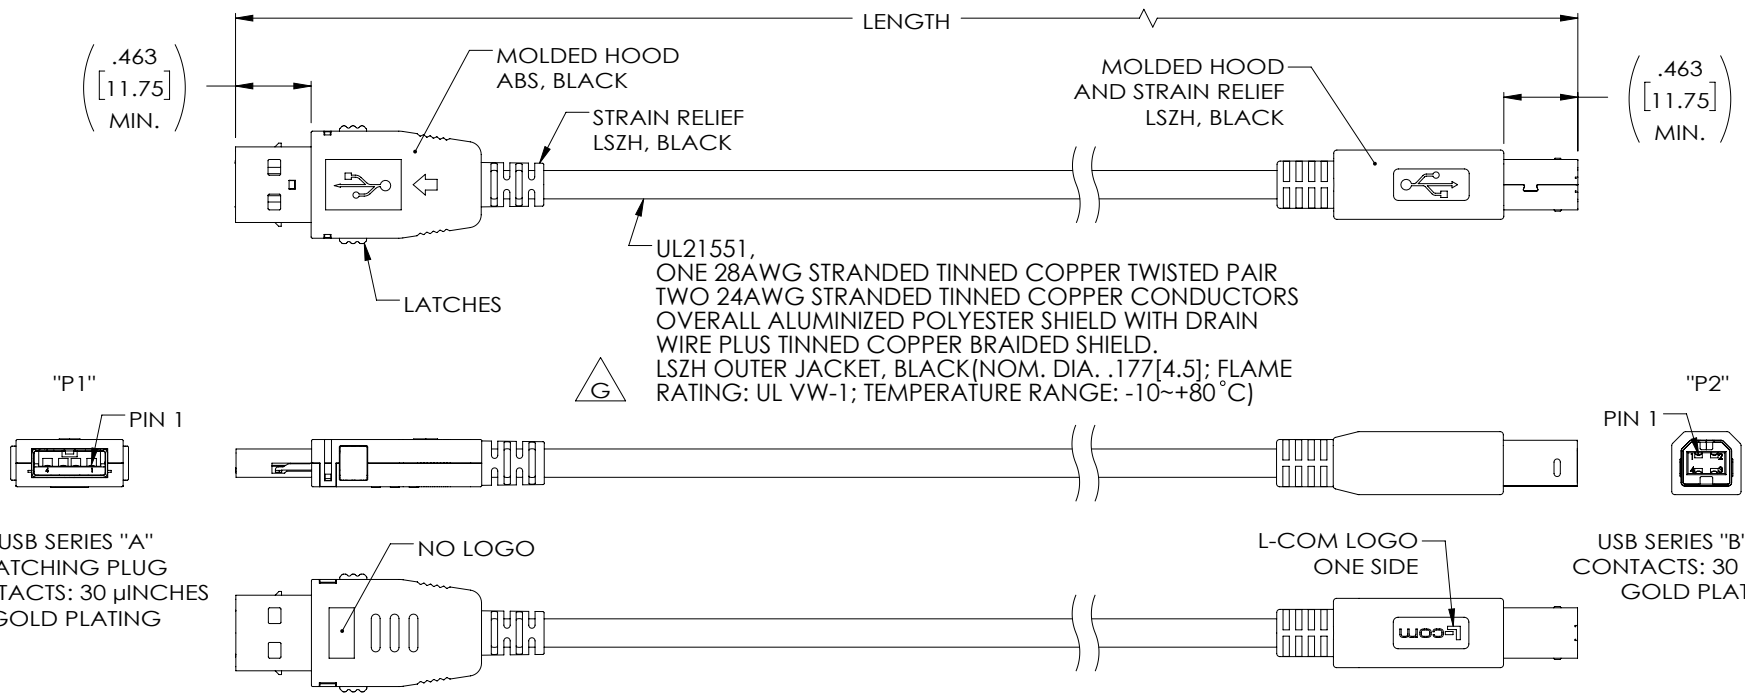

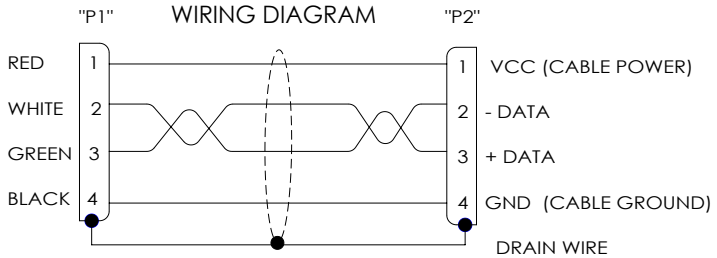

MODEL NUMBER	LENGTH METERS [FEET]
CAUZALB-03M	0.3 [.98]
CAUZALB-05M	0.5 [1.64]
CAUZALB-075M	0.75 [2.46]
CAUZALB-1M	1.0 [3.28]
CAUZALB-2M	2.0 [6.56]
CAUZALB-3M	3.0 [9.84]
CAUZALB-4M	4.0 [13.12]
CAUZALB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

LSZH CABLE CHARACTERISTICS:
FLAME RATING: IEC 60332-1
CORROSIVE GAS: IEC 60754
SMOKE EMISSION: IEC 61034
G

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	10/23/09
CHECKED BY M.MARTINEZ	10/23/09
APPROVED BY S.SMITH	10/23/09

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY occur

L-COM an INFINITE brand
50 High Street, West Mill, North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY: USB

PRODUCT DESCRIPTION: CA,USB A LATCH/STD B LSZH

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	CAUZALB	G

SCALE: NONE | CAD FILE: CAUZALB.SLDDRW | SHEET 1 OF 1

T-Rev.D