
# E30019

## Wirable plug

**SSTGH040VASFPKG**

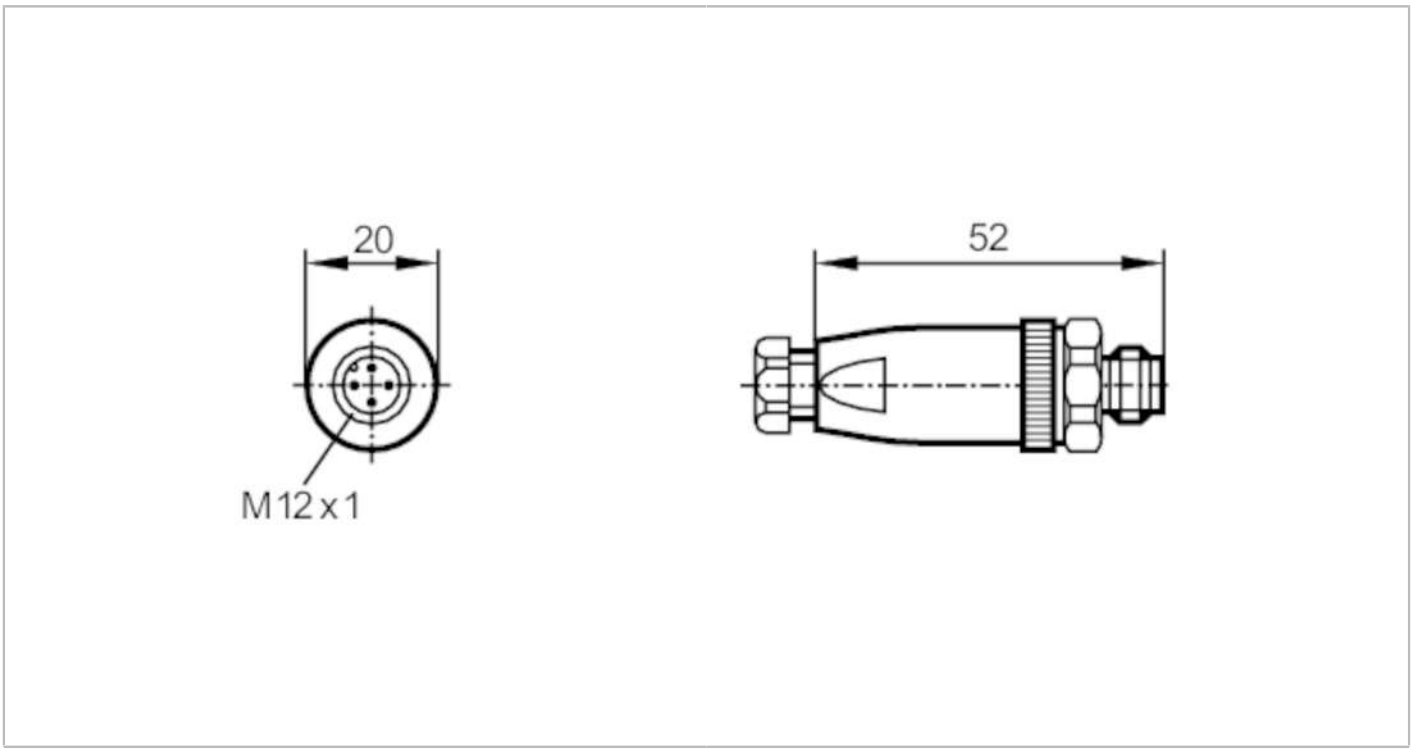


| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Gold-plated contacts |
| **Electrical data** | | |
| Operating voltage | [V] | 10...55 DC |
| Max. current load total | [A] | 4;  (...40 °C) |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -40...85 |
| Protection | | IP 67 |
| **Mechanical data** | | |
| Weight | [g] | 23 |
| Dimensions | [mm] | 20 x 20 x 52 |
| Materials | | PA |
| Moulded-body material | | PA |
| Material nut | | stainless steel (1.4571/316Ti ) |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

# E30019

## Wirable plug

SSTGH040VASFPKG

### Electrical connection

terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

### Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Moulded body: PA; Locking: stainless steel (1.4571/316Ti ); Contacts: gold-plated




### Connection

