ref : AM450/80

Anneau cousu pompier
Fireman sewed ring

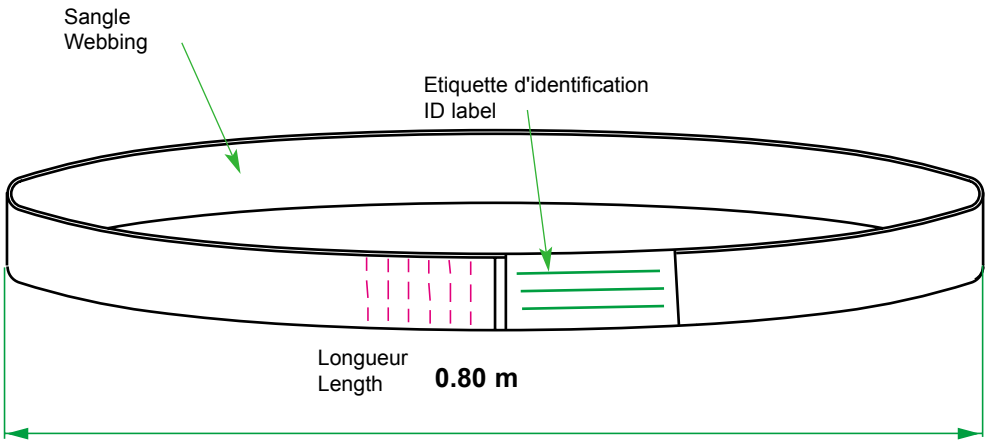

CE 0086 Conforme à la norme / Comply with standard EN795:1996/B

F Description :

Sangle
- polyester
- L= 25 mm

Résistance à la rupture du système
- 22kN

Poids net
- 60 g

GB Description :

Webbing
- polyester
- L= 25 mm

System breaking strength
- 22kN

Net weight
- 60 g

Les données descriptives de ce produit sont données à titre indicatif. Protecta international se réserve le droit de modifier le produit sans préavis.
The descriptive statements of this product are only as per indication. Protecta international reserves itself the right to modify the product without prior notice.

12/08

Capital Safety Group EMEA
Le Broc Center - Z.I. 1re Avenue
BP 15 - 06511 Carros le Broc Cedex
France
Tél : +33 (0)4 97 10 00 10
Fax : +33 (0)4 93 08 79 70
information@capitalsafety.com

Capital Safety Group Northern Europe LTD
7, Christleton Court - Stuart Road
Manor Park - Runcorn
Cheshire - WA7 1ST - UK
Tél : +44 (0) 1928 571324
Fax : +44 (0) 1928 571325
csgne@capitalsafety.com