Time and light control

Analogue timers, Wall mounting, Switching segments



tactic 111.1



tactic 211.1

Description

- The universal timers from the tactic product range offer a wide range of uses throughout the building and also outdoors. They are used in switchgear, machine controls and specific solutions such as swimming pool controls or sprinkler systems. The analog 1-channel universal time switches of the tactic series are suitable for surface-mounting, installation and DIN rail mounting, are easy to use and are equipped with a quartz or synchronous drive.

tactic 111.1

- Without power reserve

tactic 211.1

- With power reserve
- Quartz controlled


Product selection

Program	Channels	Power reserve	Shortest switching time	Programable every	Contact	Operating voltage	Type	Article number
Daily program	1	–	15 min	15 min	Changeover contact	230 V AC	tactic 111.1	01.80.0001.1
		3 days	15 min	15 min	Changeover contact	230 V AC	tactic 211.1	02.80.0001.1

Technical data

	tactic 111.1	tactic 211.1
Operating voltage	230 V AC	
Frequency	50 Hz	50–60 Hz
Installation type	Front panel installation/wall installation	
Program	Daily program	
Power reserve	–	3 days full power reserve approx. 3 days after connection to operating voltage
Switching capacity at 250 V AC, cos phi = 1	10 A	
Switching capacity at 250 V AC, cos phi = 0,6	2 A	
Programable every	15 min	
Shortest switching times	15 min	
Time accuracy at 25 °C	Synchronised with mains	≤ ± 1 s/day (Quartz)
Stand-by consumption	0,9 W	0,5 W
Type of protection	IP 20	
Protection class	II according to EN 60 730-1	
Ambient temperature	–10 °C … +55 °C	

Scale drawings

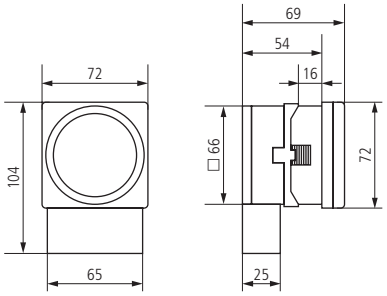

Connection examples

