Rittal – The System.

Faster – better – everywhere.

Wire end ferrules loose – AS 4050.764

Date : Oct 26, 2021

ENCLOSURES POWER DISTRIBUTION CLIMATE CONTROL IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Wire end ferrules loose – AS 4050.764

created: 26.10.2021 on www.rittal.com/com-en

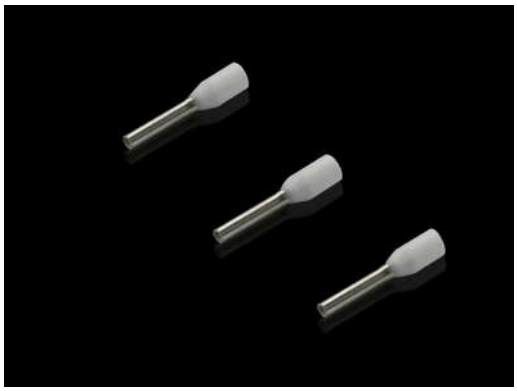

Product description

Description:	With plastic collar.
Technical specifications:	Heat-resistant to 105 °C
Standards:	AEH DIN 46228
Material:	E-Cu, galvanic tin-plated Plastic collar: Polypropylene
Note:	UL-certified in conjunction with the relevant tools, such as crimping machines.

Product description

For cross-section:	0.75 mm²
AWG:	18
Length:	8 mm
Internal diameter:	2.8 mm
Design:	for manual wire processing and crimping machines 0.5 - 2.5 mm² (length 8 mm)
Colour:	White
Colour code:	Rittal colour code: yes

Â© Rittal 2021

For:	Crimping machine L8 manual wire processing
Delivery form:	Loose
Packs of:	500 pc(s).
Weight/pack:	0.5 kg
Copper weight (kg per piece):	0
EAN:	4028177815766
Customs tariff number:	85369010
ETIM 7.0:	EC000005
ETIM 6.0:	EC000005
eCl@ss 8.0/8.1:	36659290
eCl@ss 6.0/6.1:	36659290
Product description:	Wire end ferrules for crimping machines and manual preassembly, 0.75 mm², AWG 18, 8 mm, white, loosely packed, 500 pc(s).

Approvals

Approvals:	UL + C-UL UR