DC Connector, Socket, 6.3 mm, 2.35 mm, 2-pole, solder terminal



Description

- Solder terminal:
  Screw-on mounting, from rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole, straight

Weblinks


pdf-datasheet, html-datasheet, General Product Information, RoHS, CHINA-RoHS, REACH, Mating Connectors, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data


Diameter	6.3 mm / 2.35 mm
Number of Poles	2-pole
Ratings DC	1 A / 12 VDC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal silver plated
Mounting	Screw-on mounting wall thickness max. 5.5 mm
Style	straight
Lifetime	5000 Insertions

Dimensions

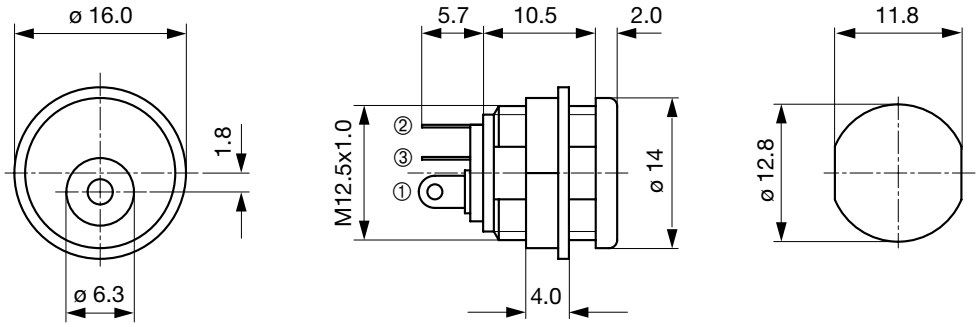

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number	
DC Plug/Socket	6.3	2-pole	solder terminal	4840.2210	

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 250 Pcs

Mating Inlets/Plugs



Category / Description	
DC Plug/Socket Overview complete	
DC Connector, Plug, 5.5x2.5 mm, 2-pole, solder terminal	4840.1210
DC Connector, Plug, 5.5x2.5 mm, 2-pole, straight, with cable	4840.5210
DC Connector, Plug, 5.5x2.5 mm, 2-pole, angled, with cable	4840.5211
DC Plug/Socket further types to 4840 DC-Stecker, verschiedene	

19.04.2015

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.