BU-00243-X

Solderless Standard Banana Plug (15 AMP)


Description:

* Standard 4mm Banana Plug
*Field serviceable, hands free operation while testing.
*Universal banana plug that can be used with all 4mm banana jacks.
*Thru-Hole deign in cap locating wire on top of insulator.
*Available in various colors
*Hook-up wire: #18 AWG



Materials:

Cap & Housing	ABS
Banana Plug	Brass Body
Spring	Phosphor Bronze
Plating	Nickel

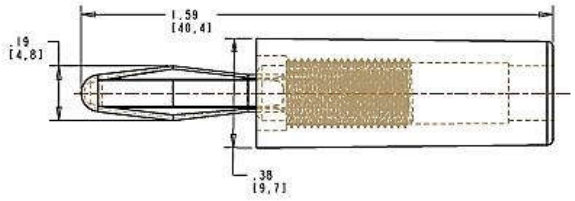

Ratings: CE Compliance:

Voltage:

*To be used safely and for personal safety do not handle with voltages over 30Vms/60 Vdc.

*Maximum "hands free" in controlled environments: 300 WVDC max.

Operating Temp: +122˚F (50˚C)

Current: 15 AMPS

ASSEMBLY INSTRUCTIONS:

1. NOTE, WIRE "IS" NEEDED FOR ASSEMBLY.
2. PREPARE CABLE AND TIN BARE END.
3. PUSH CABLE THROUGH INSULATOR.
4. NOTE CORRECT ORIENTATION.
5. PUSH CABLE INTO CONTACT BODY AND SOLDER WIRE.
6. SCREW THE BANANA CONTACT-ASM INTO INSULATOR.

How to Order:

Model: BU-00243-* (-* Indicates Color)
(*0 Black, *2 Red, *4 Yellow, *5 Green, *6 Blue, *9 White)

Contact: Sales: 1-880-955-2629
Technical Support:
techsupport@muellerelectric.com
Fax: 216-771-3068

Where to Purchase:
International: 216-771-5225
www.muellerelectric.com