stay connected

MIRO TR 24VDC SK 5P OPTO-COUPLER MODULE

IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
24 V DC
short-circuit protected
Switching frequency: max. 1 kHz
Screw terminals

Link to Product

Illustration



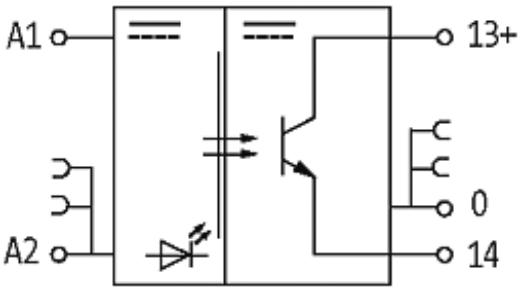

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

MURR ELEKTRONIK
stay connected

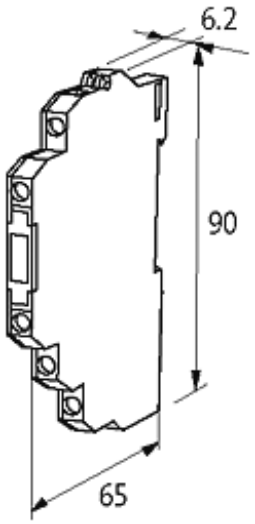

Product may differ from Image

Approvals

Input

Voltage range ON	10...48 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	90×6.2×65 mm

Output

Switching voltage	10...35 V DC
Switching current per output	1 mA...2 A (short-circuit protected)
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	90/120 µs
Switching frequency	max. 1 kHz

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16