Model 2269
Insulated Double Banana Jack

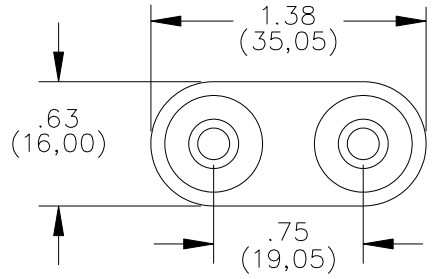

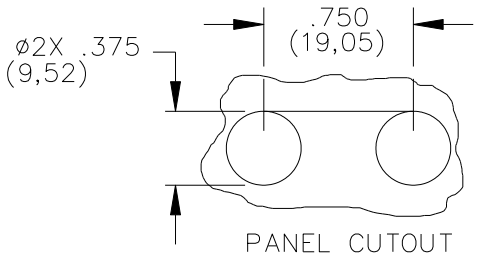

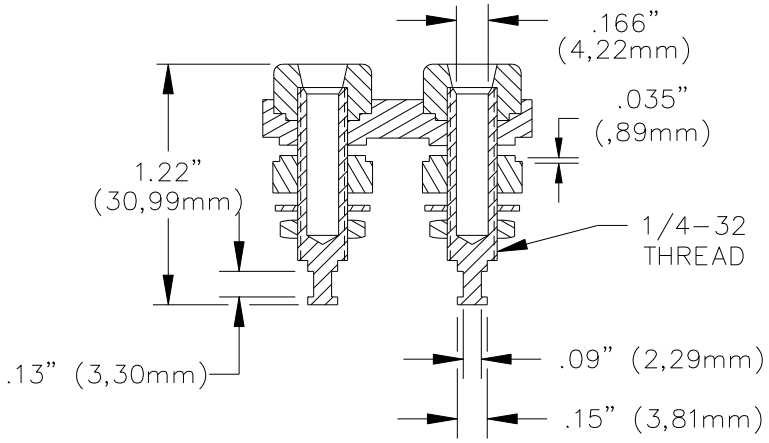



FEATURES:

✓ Mounts in panels from .070" to .375" (1.60mm to 9.53mm).

MATERIALS:

Banana Jack: Bright Tin Plated Brass
Mounting Base: Polycarbonate
Insulator: Polycarbonate
Lockwasher: Nickel Plated Steel
Hex Nut: 3/8" ¼-32 Nickel Plated Brass
Solder Turret: Bright Tin Plated Brass

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Operating Temperature: +239ºF (+115ºC) Max.
Current: 15 Amperes

ORDERING INFORMATION:
Model 2269-0 (Black Base)
Model 2269-2 (Red Base)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com