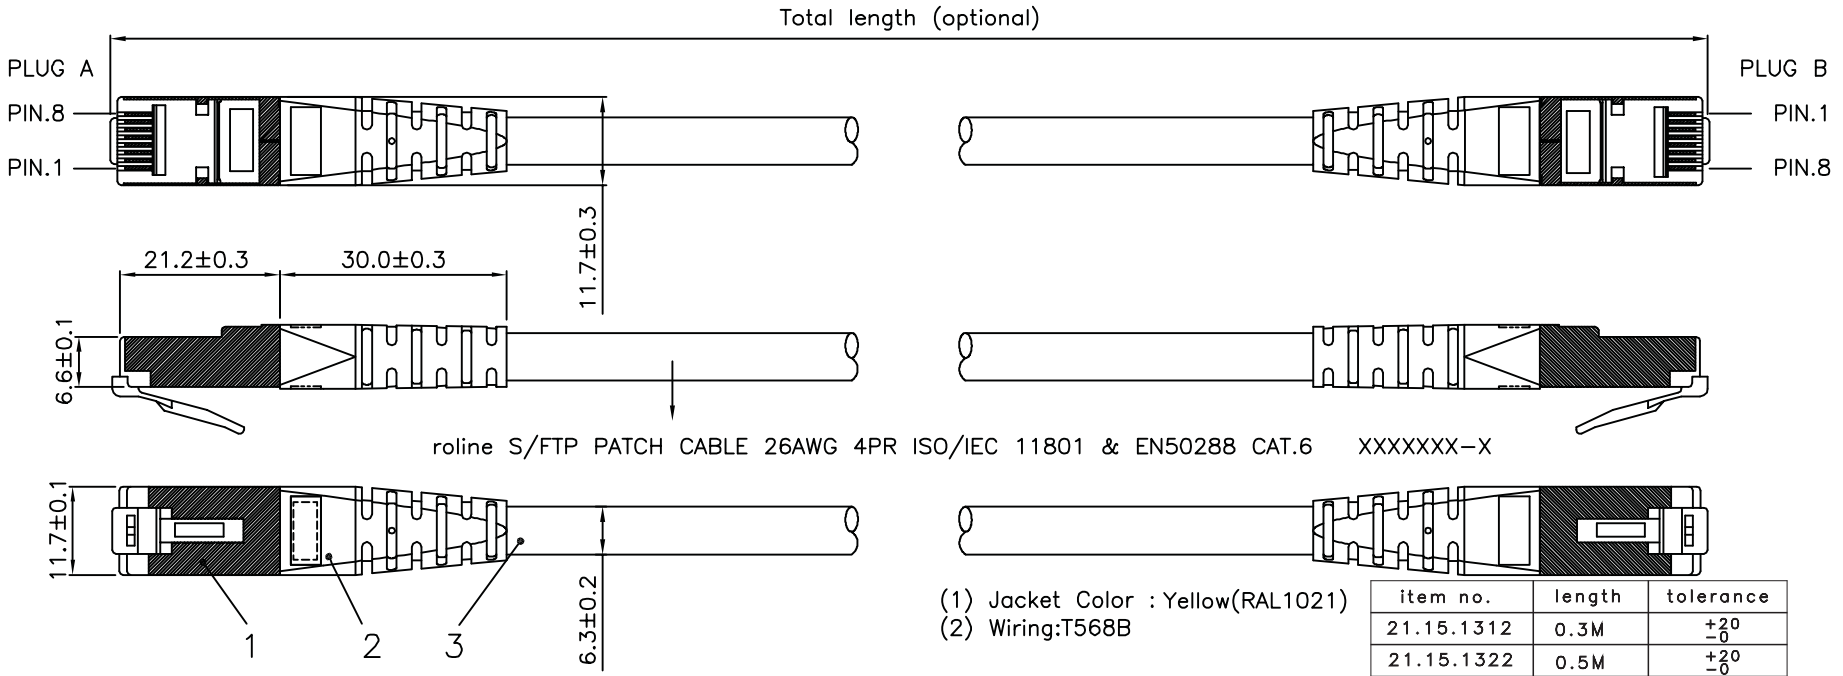


(1) Jacket Color : Yellow(RAL1021)
(2) Wiring:T568B

item no.	length	tolerance
21.15.1312	0.3M	+20 −0
21.15.1322	0.5M	+20 −0
21.15.1332	1M	+20 −0
21.15.0825	1.5M	+20 −0
21.15.1342	2M	+20 −10
21.15.1352	3M	+20 −10
21.15.1362	5M	+30 −20
21.15.1372	7M	+30 −20
21.15.1382	10M	+30 −20
21.15.1392	15M	+30 −20
21.15.1402	20M	+70 −30

Specification :

Material :
1. RJ45 Plug :
   1-1. Housing : Polycarbonate,Transparent color.
   1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
   1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
   1-4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
   3-1. Jacket : PVC.
   3-2. Conductor : 26 AWG stranded copper.
   3-3. Isolation : PE.
   3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.
5. Minimum Bending Radius: 50mm

item no					
21.15.1312	21.15.1322	21.15.1332	21.15.0825	21.15.1342	21.15.1352
21.15.1362	21.15.1372	21.15.1382	21.15.1392	21.15.1402	
Desc	ROLINE Cat 6 S/FTP Patch Cord,Yellow				

"#": Matching DIM.
"*": Important DIM.
Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	23.JuL.2016	byz
CHECK	23.JuL.2016	Jane
APPROVAL	23.JuL.2016	Jaimy
	DATE	NAME

SCALE 1/1 (A4) UNIT mm

DRAWING NO.
DRAWING CLASSIFICATION S SHEET 1 OF 1
A1

SECOMP

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

0 10cm