Kelvin-Messleitung mit Pinzette

- 2 Federkorbstecker konfektioniert an hochflexibler, doppelt-isolierter PVC-Leitung 0,75 mm² und Pinzette konfektioniert an Koaxkabel-Typ RG 174/U
- Diese Kelvin-Messleitung wurde speziell für Vierleitermessungen entwickelt
- Maulöffnung der Pinzette max. 17 mm
- Den Warnhinweis WH 003 finden Sie unter www.schuetzinger.de

Best.-Nr.
KML 7488 / PZ / 0.75 / 100

• Kontaktteile	**vergoldet**
• Leitung	0,75 mm² PVC-doppelt-isoliert, Koaxkabel-Typ RG 174/U
• Isolierteile	PA (Polyamid) TPE (Evoprene)
• **Farben**	siehe Tabelle

WH 003


Kelvin measuring lead with tweezer


- *2 lamella-basket plugs assembled on highly flexible, double-insulated PVC cable 0.75 mm² and tweezer assembled on coaxial cable typ RG 174/U*
- *this Kelvin measuring lead has been especially developed for four-wire measurement*
- *tweezer opening 17 mm max.*
- *please visit www.schuetzinger.de to find the warning notice WH 003*

Order No.
KML 7488 / PZ / 0.75 / 100

• *contact parts*	***gold-plated***
• *cable*	*0.75 mm² PVC double-insulated, coaxial cable type RG 174/U*
• *insulation*	*PA (Polyamid) TPE (Evoprene)*
• ***colours***	*see table*

WH 003

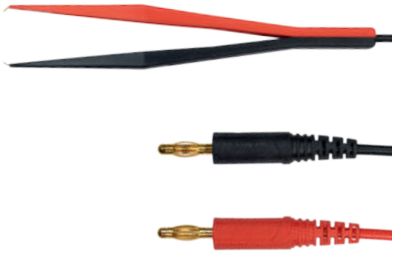

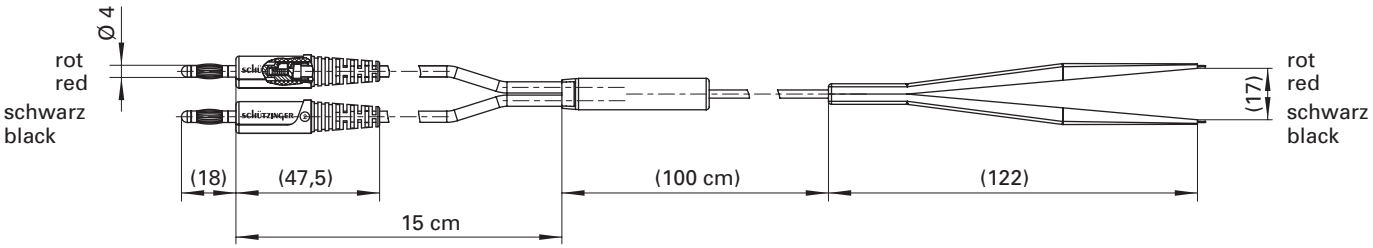

Allgemeine Angaben	
Best.-Nr. [1]	**KML 7488 / PZ / 0.75 / 100** Kontaktteile vergoldet
Farben	schwarz, rot
Längen	100 cm
Technische Daten	
Leitung	PVC-doppelt-isol. 0,75 mm² Koaxkabel-Typ RG 174/U
Durchgangswiderstand	außen 320 mΩ innen 60 mΩ
Bemessungsspannung [2]	33 V_{AC} / 70 V_{DC}
Bemessungsstrom [2]	1 A per Leitung
Temperatur-Einsatzbereich	von -10 °C bis +50 °C

[1] andere Kontaktoberflächen, Farben und Längen auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***KML 7488 / PZ / 0.75 / 100*** *contact parts gold-plated*
colours	*black, red*
lengths	*100 cm*
Technical data	
cable	*PVC double-insul. 0.75 mm²* *coaxial cable type RG 174/U*
transition resistance	*outside 320 mΩ* *inside 60mΩ*
rated voltage [2]	*33 V_{AC} / 70 V_{DC}*
rated current [2]	*1 A per lead*
operating temperature	*from -10 °C to +50 °C*

[1] *other contact platings, colours and lengths on request*
[2] *at normal ambient temperatures*