ALLEGION™

Briton 3934

Overhead electro-mag door closer

DATA SHEET - **136**

Typically used on fire rated doors where the hold-open or swing-free feature is required either in high traffic areas for convenience or in situations where it would be difficult to satisfy the maximum opening force requirements of Approved document M of The Building Regulations 2010.

Each unit can be set to either 'hold-open' or 'swing-free' operation. In either case the spring closing function of the closer can be temporarily disabled to allow free passage. When de-activated via a connection to the building fire alarm or smoke detection system, the electromagnet disengages and the door closer closes the door in the normal manner to maintain fire safety.



Certification

- CE Marked to EN1155 & EN 1154 - (AE 5012)
- Fire tested to EN1634 for use on fire doors up to 2hr timber
- Certifire approved CF 5598
- DoP available at www.britondops.co.uk


Features & Functions

- Template adjustable power Size EN 3-4 (see table)
- Stainless steel grade 304 softline cover available in silver and satin steel finishes to suite with Briton 2300 and 2700 closers with softline covers to complement a variety of door hardware ranges.
- Designed for use on low voltage circuits 24V DC linked to a fire alarm
- Solution offering hold-open and free swing
- Easy Installation
- Attractive compact design
- Test switch included
- When the fire alarm is activated, the door will close automatically from any position to help prevent the spread of fire


Ref:	Description	Finish
3934.FH.SES	Template adjustable EN 3-4 swing free or hold open – Silver	SES
3934.FH.SSS	Template adjustable EN 3-4 swing free or hold open - stainless steel	SSS


Mounting	Power size	Max. door opening	EN Classification
Door mount	3	180°	3 8 3/4 1 1 3
	4	110°	
Transom mount	3	180°	3 8 3 /1 1 3
	4	110°	
Parallel mount	3	170°	3 8 3 -1 1 3

Softline cover view from under closer

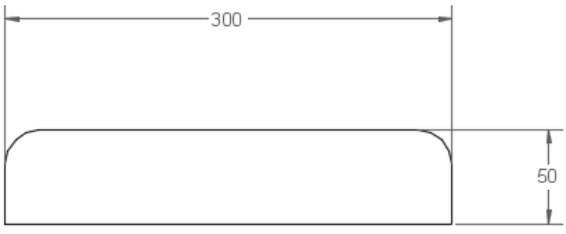

Closer with projecting arm and flowline cover

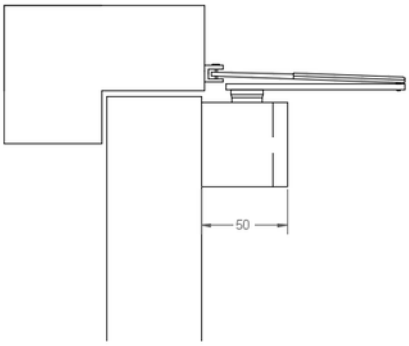

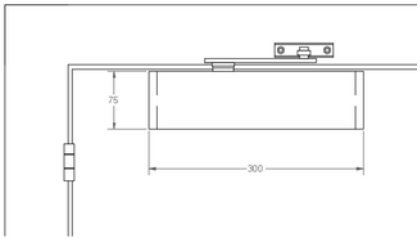

Allegion (UK) Limited
35 Rocky Lane, Aston, Birmingham B6 5RQ

Tel: +44 (0) 121 380 2400

© 2017 Allegion (UK) Ltd - Issue 1 October 2017