


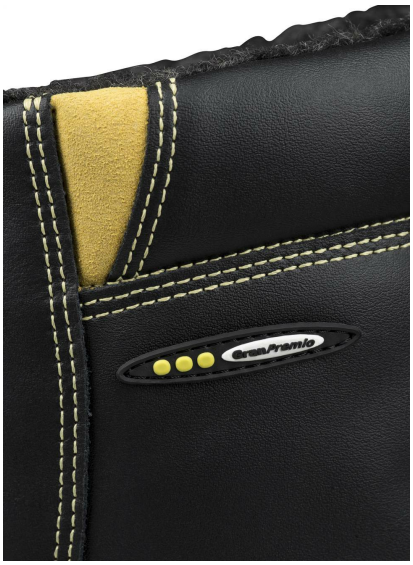

jalas® GRAN PREMIO 1898W WINTER KING

EN ISO 20349-2:2017 S3, SRC, CI, HRO, HI, WG EN ISO 20345:2011 S3, SRC, CI, HRO, HI, WG

Learn more

A high-cut, triple-lined winter safety boot with highest protection for very cold environments. Specially treated leather with heat resistance para-aramid thread in the seams provides a max operating heat limit of 400°C/752°F for 30 minutes and resists weld spatter. "W" in the name indicates that the boot is certified for welding. The oil and heat-resistant nitrile outer sole gives excellent grip and JALAS® aluminium toe cap, plasma-treated textile puncture protection and double impact protection zones in PORON® XRD® mean safety with every step.

CHARACTERISTICS

- Highest level of protection
- Excellent grip
- Perfect fit
- Extra comfortable
- Extremely warm
- Excellent shock absorption

FUNCTIONS

- ProNose toe reinforcement
- Wide fit
- KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit)
- Heat-resistant upper
- Heat-resistant outsole
- Oil-resistant outsole
- Anti-static properties
- Padded boot shaft
- Pull loops
- Water repellent
- Double shock absorption zones
- Conforms with IEC 61340-5-1 (ESD)
- Heat-resistant
- Withstands welding sparks and grinding splash

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF

Toe injuries, nail penetration, antistatic, contact with cold

PRIMARY ENVIRONMENTS OF USE

Outdoors, warm surfaces, environments with risk for outsole penetration, cold environments, harsh environments

PRIMARY AREAS OF USE

Hot work, metalwork, sheet-metal work, welding

PRIMARY INDUSTRIES OF USE

Metal fabrication

SPECIFICATION

TYPE Safety footwear, Boots
CATEGORY Cat. II
NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile
FITTING Wide
COLLECTION Gran Premio
UPPER MATERIAL PU-coated leather
PRONOSE MATERIAL PU
TOECAP MATERIAL Aluminium
LINING MATERIAL Meida® thermo insulation, Polyester fur, Aluminium foil
INSOLE FX2 ThermAL
INNERSOLE MATERIAL Textile, Aluminium foil, Soft EVA, Merino wool, Double shock absorption zones in Poron® XRD®
MIDSOLE MATERIAL PU midsole
OUTSOLE MATERIAL Nitrile rubber outsole
COLOUR Black, Grey, Yellow
NET WEIGHT, (SIZE 42) 1.62 kg

COMPLIANCE

CE Cat. II
EN ISO 20349-2:2017
S3, SRC, CI, HRO, HI, WG

EAC TP TC 019:2011
EN ISO 20345:2011
S3, SRC, CI, HRO, HI, WG

FEATURES

- Anti-static properties
- ESD
- Heat-resistant upper
- Aluminium toecap
- Oil-resistant outsole
- ProNose toe reinforcement
- Nail protection in plasma-treated composite (PTC) textile
- Wide fit
- Heat-resistant outsole
- Water repellent
- Winter model

SIZE				ARTICLE NUMBER	EAN
EU	UK	US M	US W		
35	2	3½	4	1898W-35	6408487522727
36	3	4	5	1898W-36	6408487522734
37	4	5	6	1898W-37	6408487522741
38	5	5½	6½	1898W-38	6408487522758
39	6	6½	7½	1898W-39	6408487522765
40	6½	7½	8½	1898W-40	6408487522772
41	7	8	9	1898W-41	6408487522789
42	8	9	10	1898W-42	6408487522796
43	9	9½	11	1898W-43	6408487522802
44	10	10½	11½	1898W-44	6408487522819
45	10½	11	12½	1898W-45	6408487522826
46	11	12	13	1898W-46	6408487522833
47	12	13	14	1898W-47	6408487522840
48	13	13½	14½	1898W-48	6408487522857
49	14	14½	15½	1898W-49	6408487522864
50	15	15½	16½	1898W-50	6408487522871

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.