EVC314

Connection cable

VDOGF040MSS0005H04STGF040MSS

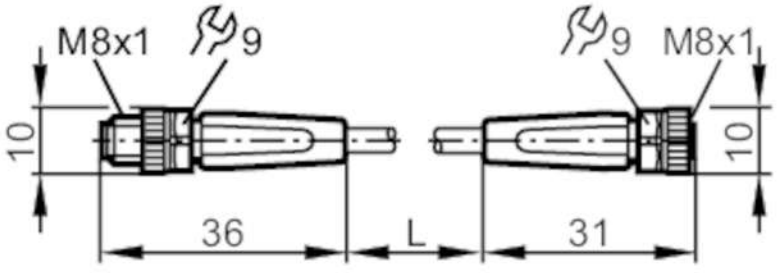

Application					
Free from silicone		yes			
Electrical data					
Operating voltage	[V]	< 50 AC / < 60 DC			
Protection class		III			
Max. current load total	[A]	3			
Operating conditions					
Ambient temperature	[°C]	-25...90			
Note on ambient temperature		cULus: ...80			
Ambient temperature (moving)	[°C]	-25...90			
Note on ambient temperature (moving)		cULus: ...80			
Protection		IP 65; IP 67; IP 68; IP 69K			
Mechanical data					
Weight	[g]	122.6			
Materials		housing: TPU orange; Sealing: FKM			
Material nut		brass / brass			
Drag chain suitability		bending radius for flexible use	min. 10 x cable diameter		
		travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and		

EVC314

Connection cable

VDOGF040MSS0005H04STGF040MSS

		max. acceleration of 5 m/s²			
	bending cycles		> 5 Mio.		
	torsional strain		± 180 °/m		

Remarks

Pack quantity	1 pcs.

Electrical connection

Cable: 5 m, PUR, Halogen-free, black, Ø 3.7 mm; 4 x 0.25 mm² (32 x Ø 0.1 mm)

Electrical connection - plug

Connector: 1 x M8, straight; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.3...0.5



Connection

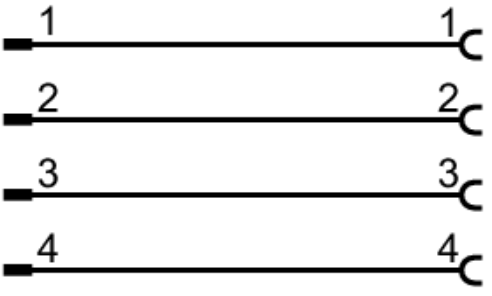

Electrical connection - socket

Connector: 1 x M8, straight; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.3...0.5

