EN

Professionally approved products.

Datasheet

0673 Brass, Sintered Bronze 12bar Pneumatic Silencer, Threaded, M5 x 0.8 Male

RS Stock number 722-261





0673
THREADED SILENCER, BSP PARALLEL, METRIC AND UNF

maximum working pressure	**bar** 12	**MPa** 1,2	**psi** 174
working temperature	**°C (Celsius)** From -20 to 150	**F (Farenheit)** From -4 to 302	**K (Kelvin)** From 253 to 423
body	brass		
sub-base	brass		
silencer	sintered bronze		

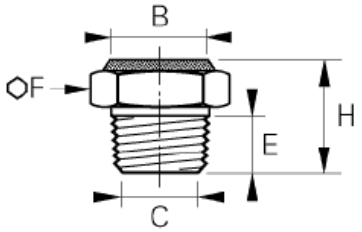

	C	E (mm)	F (mm)	H (mm)	(kg)
0673 00 10	G1/8	8,0	14,0	14,0	0,007
0673 00 13	G1/4	8,0	17,0	14,0	0,011
0673 00 17	G3/8	10,0	22,0	17,0	0,017
0673 00 19	M5x0,8	4,0	7,0	8,0	0,002
0673 00 20	10-32	5,0	7,0	12,0	0,007
0673 00 21	G1/2	12,0	27,0	21,0	0,027

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

Flow rates for 0670 silencers in Nl/hr (Normal litres per hour)

RS S/N	LEGRIS P/N	2 Bar	4 Bar	6 Bar
722-261	0670 0019	41.7	89.7	139
722-277	0670 0010	217	436	641
722-283	0670 0013	689	1306	1914
-	0670 0017	1596	2384	3388
-	0670 0021	2159	3747	5300
-	0670 0027	3887	6130	8523
-	0670 0034	-	-	-