

M3PA


Empty non-metallic enclosure, with START-STOP/RESET buttons, for BF40, BF50, BF65, BF80, BF94 contactors



Product designation			Empty enclosures
Product type designation			M3PA
Electrical features			
Maximum operating current (≤440V)		A	80
Components			
Contactor standard supplied			BF40A, BF50A, BF65A, BF80A, BF94A
Thermal relay to purchase separately			RF82
Mechanical features			
Weight		g	1900
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			

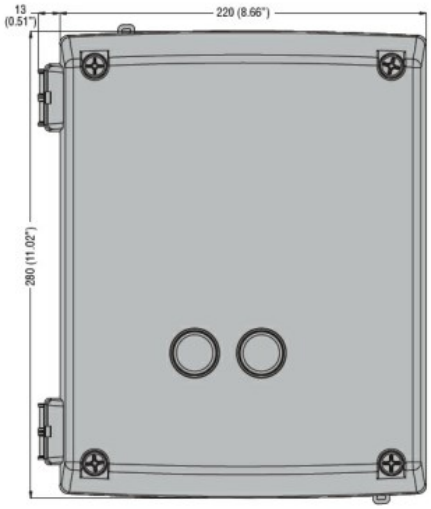

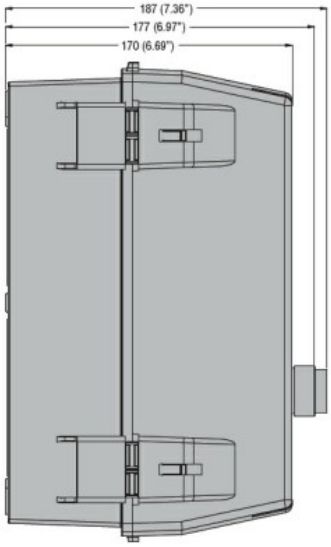

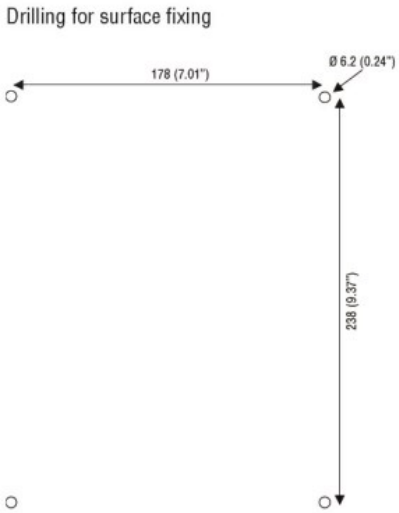


Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

M3PA

Empty non-metallic enclosure, with START-STOP/RESET buttons, for BF40, BF50, BF65, BF80, BF94 contactors

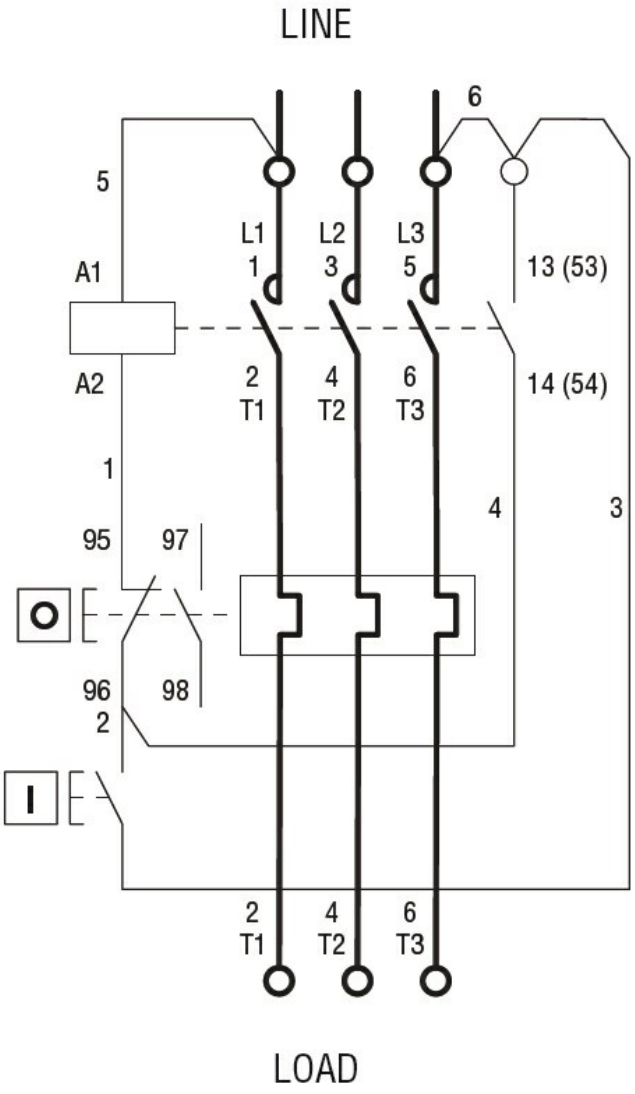

I = Start; O = Stop/Reset

Certifications and compliance

Compliance

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508

Certificates

	cULus

ETIM classification

ETIM 8.0	EC000200 - Enclosure for control circuit devices

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding