

Radio ◲ 1/4" range

Wobble extensions

Inaccessible with a socket or a universal joint ? Use a wobble extension !

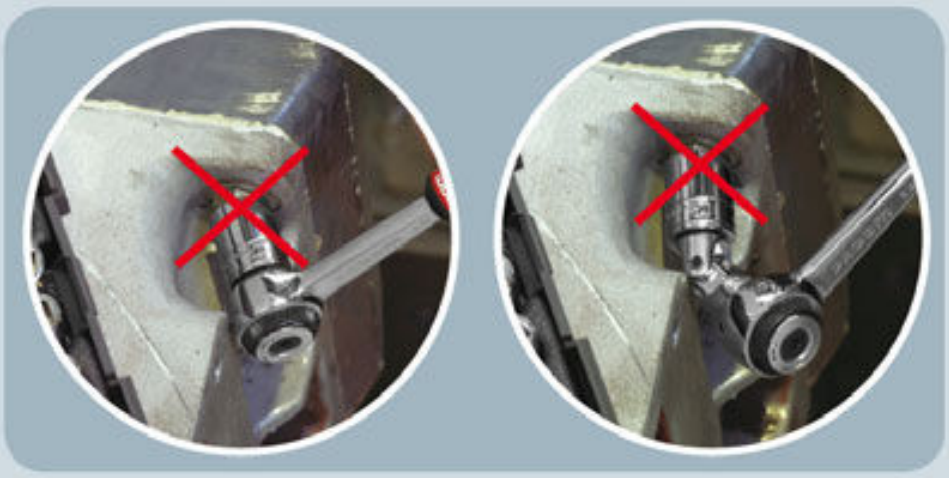

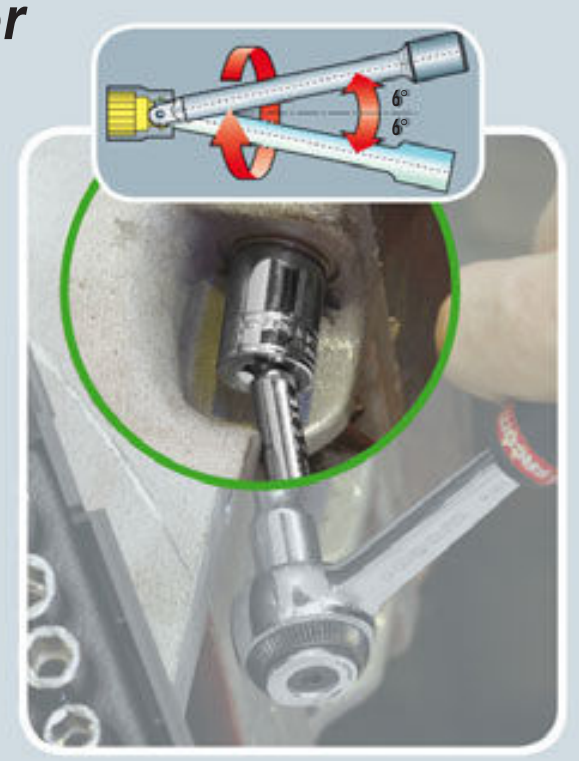

R.S 1/4" drive wobble extensions

• Square drive profile gives 6° working angle.


	B mm	D mm	L mm	⚖ g
R.209S	8,2	12	55	30
R.210S	8,2	12	100	45



R 1/4" drive flexible extension 150 mm

R.216


• Reaches fasteners out of direct access line.
• Unsuitable for high torques : max. 2.8 N.m.
⚖ : 66 g.

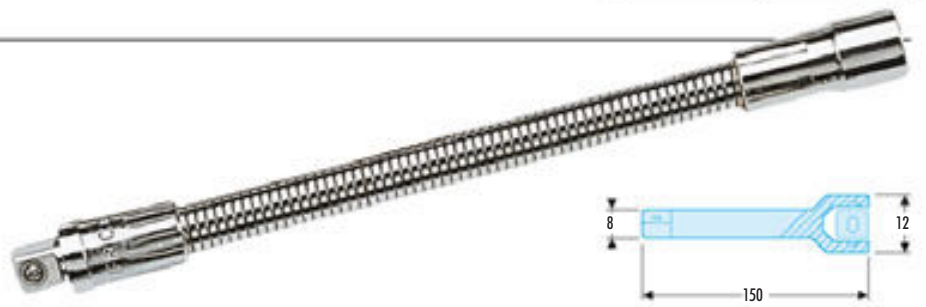

1/4" universal joint

R.240A

▷ Performance : to ISO 3316, DIN 3123, NF ISO 3316.
• Spring-stiffened joints. Stays in position when reaching for fasteners.
• Significant time savings.
⚖ : 20 g.

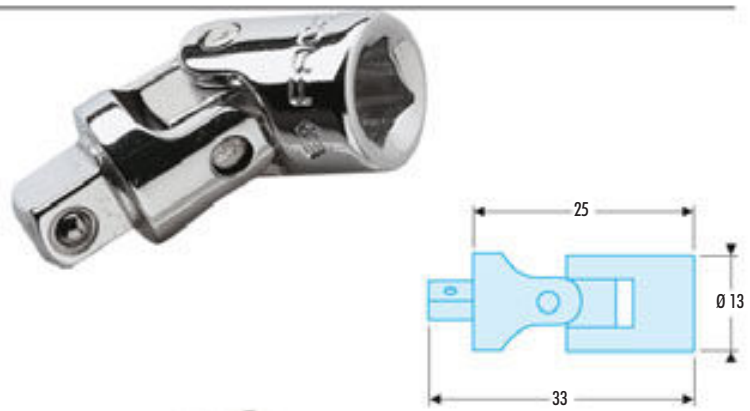

1/4" to 3/8" coupler

R.232

• 1/4" female to 3/8" male square drive.
• For adapting 3/8" drive sockets.
⚖ : 16 g.

