stay connected

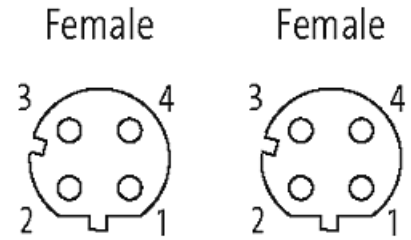
**M12 gender-changer female / female D-cod.**

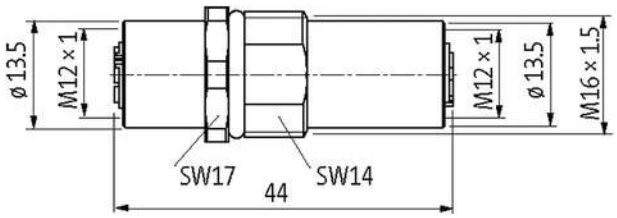
Ethernet CAT5
Control cabinet entry system
Female/female
M12, 4-pole
D-coded
shielded

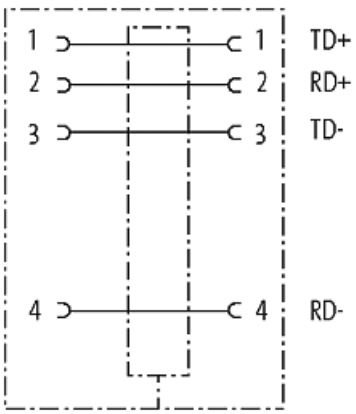
## Link to Product

### Illustration






Product may differ from Image

### More Info

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

MURR ELEKTRONIK
stay connected

EtherNet/IP | PROFINET | EtherCAT

| | |
|---|---|
| **Form** | |
| Form | 44611 |
| **Technical Data** | |
| Operating voltage | max. 60 V AC/DC |
| Rated surge voltage | 0.8 kV |
| Operating current per contact | max. 4 A |
| Transfer parameters | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1) |
| Transfer rate | up to 100 Mbit/s full duplex |
| Coding | M12, D-coded |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland | M16 (SW19) |
| Protection | IP67 inserted and tightened (EN 60529) |
| Material | Brass, nickel plated |
| **General data** | |
| Temperature range | -25...+85 °C |
| **Commercial data** | |
| country of origin | DE |
| customs tariff number | 85366990 |
| EAN | 4048879140928 |
| eClass | 27279220 |
| Packaging unit | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20